


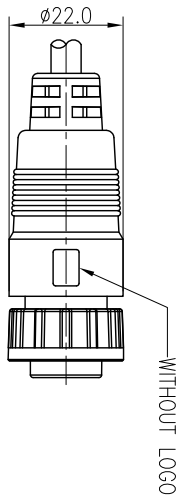


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S141029-11A	Yang-Hu	2015.01.13

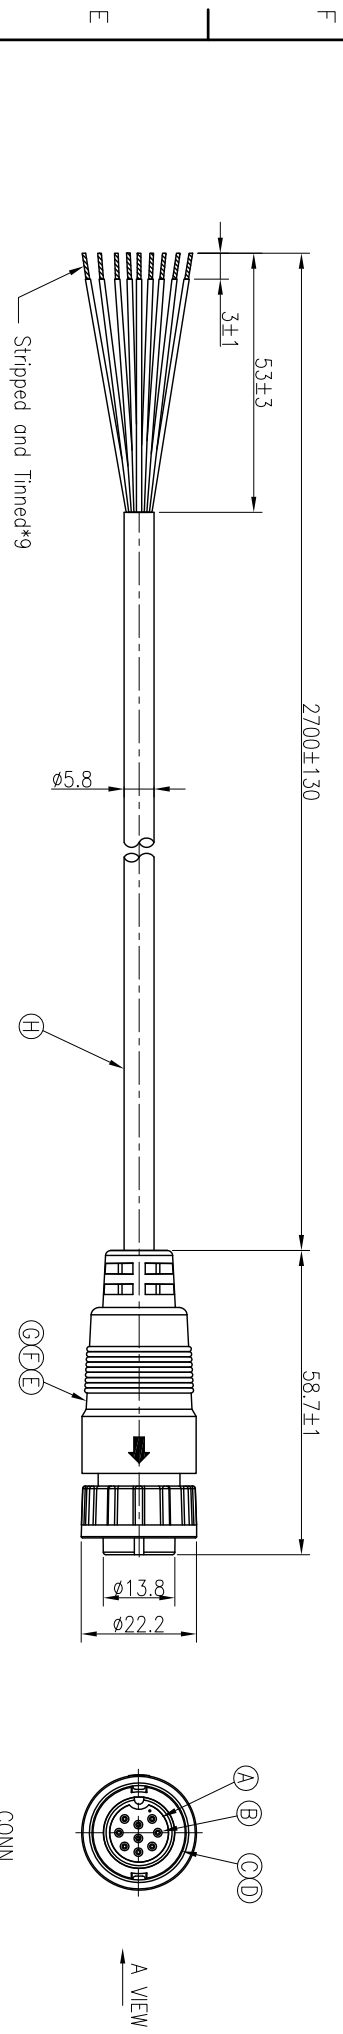

WATERPROOF RATE: IP67

9	BLACK
8	RED
7	PINK
6	GRAY
5	YELLOW
4	GREEN
3	WHITE
2	BLUE
1	BROWN
CONN. WIRE COLOR	
PIN OUT	
CONN.	



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR-PASS**

H	CABLE	1	UL2464 24AWG*9C+AL UV RESISTANT OD=05.8	BLACK(PVC JACKET)
G	HEAT SHRINK TUBE	9	125' 300V L=9mm	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	MALE PIN	9	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:	TITLE	Singatron Enterprise Co., Ltd. 信譽企業股份有限公司
X :±0.5	X :±2°	CIRCULAR MIDDLE SIZE (IP67)	
XX :±0.3	XX :±1°	FEMALE CONN. MALE 9P(M/5A) LOCK TYPE	
XXX :±0.2		CHKD	JF
		APVD	Horlen

PART NO. 2CM3016-W09310H
SCALE 1:1 UNIT: mm
SHEET: 1 OF 1 REV: A
CUSTOMER COPY