



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140325-4B	JF	2015.01.22

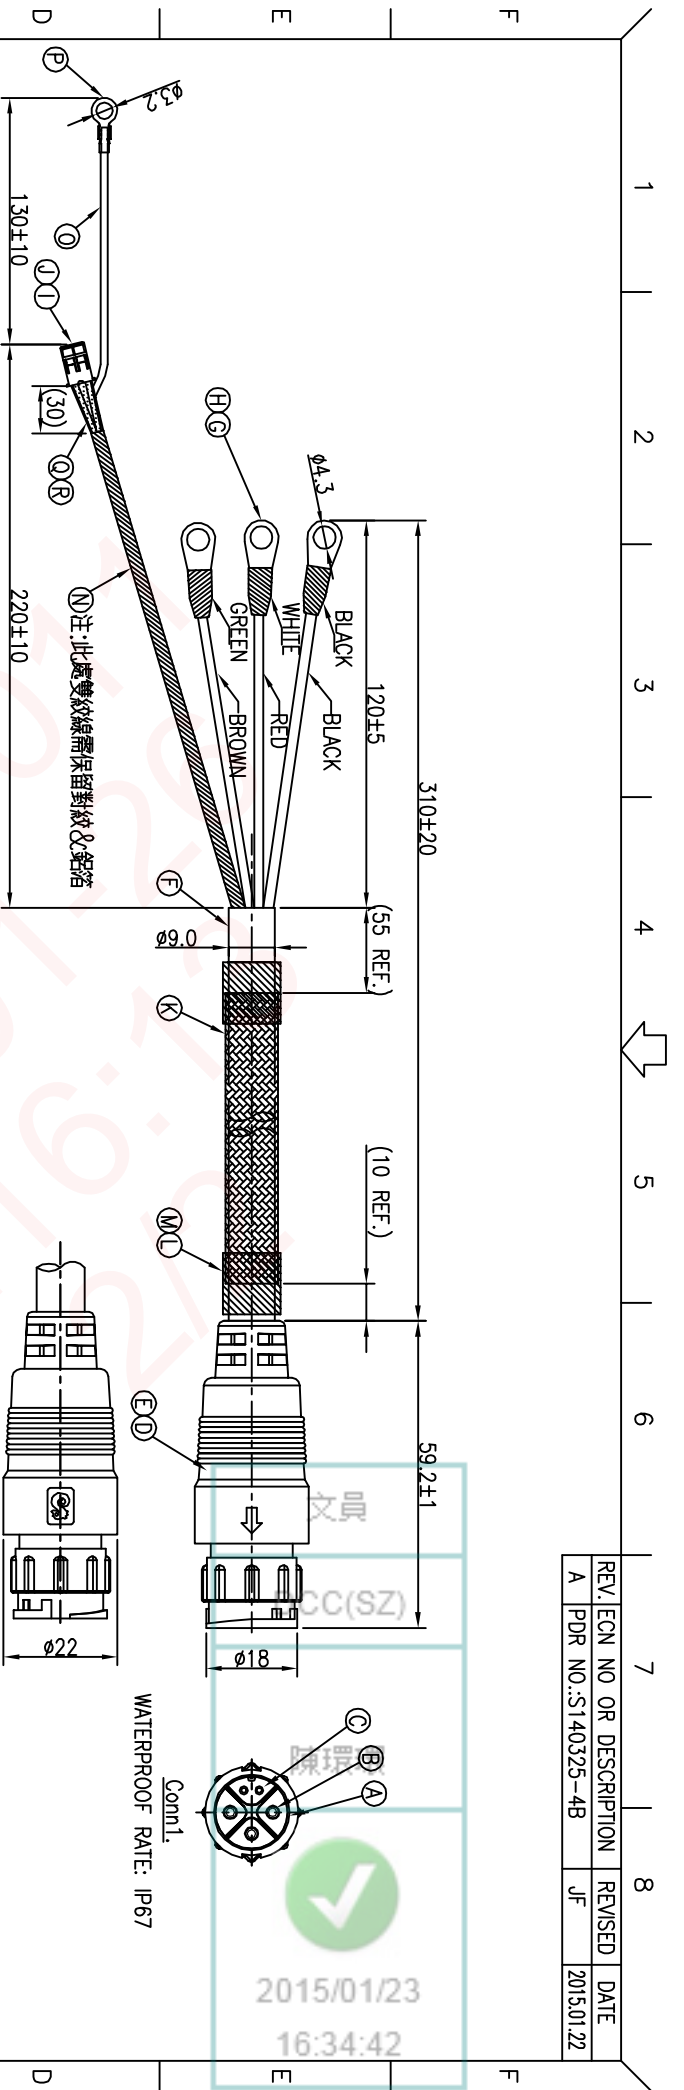


WATERPROOF RATE: IP67



2015/01/23
16:34:42

M	ACETATE TAPE	2	W20 TO.18	BLACK
L	HEAT SHRINK TUBE	2	Ø15.0 L=20mm	BLACK
K	STAINLESS STEEL BRAID	1	STAINLESS STEEL	N/A
J	TERMINAL	2	PHOSPHOR BRONZE	GOLD PLATING
I	HOUSING	1	NYLON66	WHITE
H	HEAT SHRINK TUBE	3	Ø5.0 125' 600V	COLOR
G	O-TERMINAL	3	BRASS	TIN-PLATED
F	CABLE	1	UL2464 14#*3C+(CAT.5E 24#*1P+AL) (W) 009.0	BLACK(PVC JACKET)
E	INNER MOLD	1	TPU	NATURAL
D	OVER MOLD	1	PVC	BLACK
C	MALE PIN	2	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
B	MALE PIN	3	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

- NOTES:
1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS
CURRENT RATING: 20+2A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

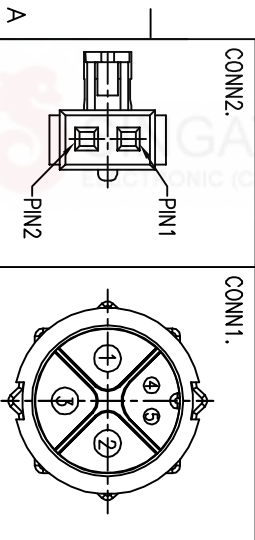

CONN2.	CONN1.	CONN2.	CONN1.
WHITE(24AWG)	GREEN(24AWG)	WHITE(24AWG)	GREEN(24AWG)
BROWN(14AWG)	BLACK(14AWG)	BROWN(14AWG)	BLACK(14AWG)
RED(14AWG)	RED(14AWG)	RED(14AWG)	RED(14AWG)
WIRE COLOR	WIRE COLOR	WIRE COLOR	WIRE COLOR

R	CONDUCTIVE FABRIC TAPE	1	W15*10.11	GRAY
Q	ACETATE CLOTH TAPE	1	W15*10.12	BLACK
P	O-TERMINAL	1	J602-BS ID=3.2	TIN-PLATED
O	WIRE	1	UL1007 24AWG	BLACK
N	HEAT SHRINK TUBE	1	Ø3.5 125' 300V	BLACK

DECIMALS:	ANGLES:	TITLE	CIRCULAR MIDDLE SIZE (IP67) LOCK TYPE
X :±0.5	X :±2'	DMN	JF
XX :±0.3	XX :±1'	CHKD	Harden
XXX :±0.2		APVD	Quan

Singatron Enterprise Co., Ltd.
信譽企業股分有限公司
PART NO.2CM3024-W05B01H
SCALE 1:1 UNIT: mm
SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY