
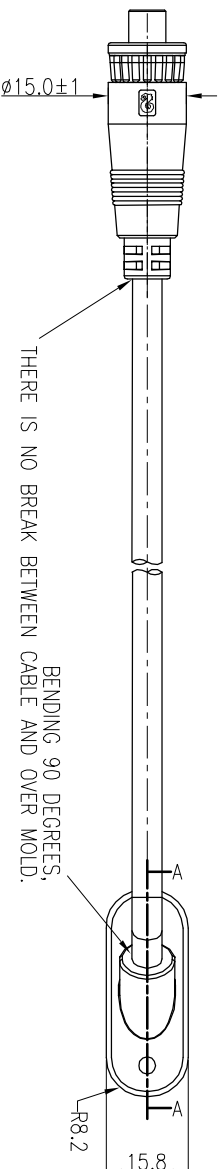




REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B	ECN NO.:S201911-C17	Wcky	2019.11.28
C	ECN NO.:S202003-C06	Wcky	2020.03.10
D	ECN NO.:S202005-C19/A	RZ	2020.06.12

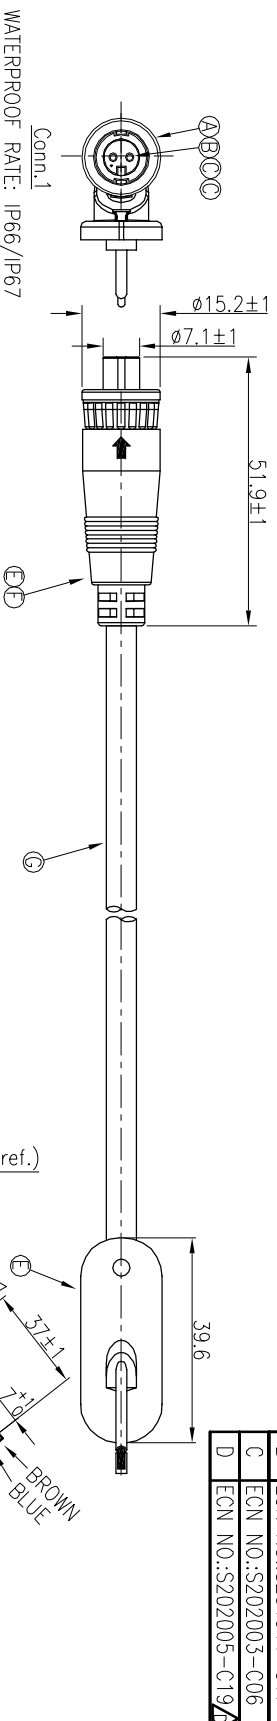

TX P/N	SINGATRON NO.
D30063859	2CN3004-W02401H

- NOTES:
1. WATERPROOF RATE: IP66/IP67
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE:-40° TO +105°
 - CONTACT RESISTANCE: 0.1 ohm (connector&soldering point)
+0.0163 ohm/meter(cable)

2	BLUE
1	BROWN
CONN.1 WIRE COLOR	
PIN OUT	
CONN1	



- RATING: 60V AC/DC 10A
TEST CONDITION: DC300V 10Mohm 10ms
SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
TO CONFORM TO ROHS REQUIREMENT AND REACH REGULATION
GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
Chino RoHS, RoHS & REACH COMPLIANCE
NON-HUMAN FACTORS CAUSE SERVICE LIFE IS 5 YEARS

G	CABLE	1	UL21996 17AWG*2C	BLACK(PVC JACKET)
F	INNER MOLD	1	TPEE	NATURAL
E	OVER MOLD	2	PA66-FR370(11)	BLACK
D	O-RING	1	SILICONE	RED
C	LOCK NUT	1	PA66	BLACK
B	FEMALE PIN	2	Phosphor Bronze	1~3μ" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

CIRCULAR STANDARD SIZE
FEMALE CONN. FEMALE (2) PIN(10A)
TITLE: **PART NO.2CN3004-W02401H**

DWN RZ
CHKD Cerry
APVD William

SCALE 2:1
UNIT: mm

SHEET: 1 OF 1
REV: D

CUSTOMER COPY