

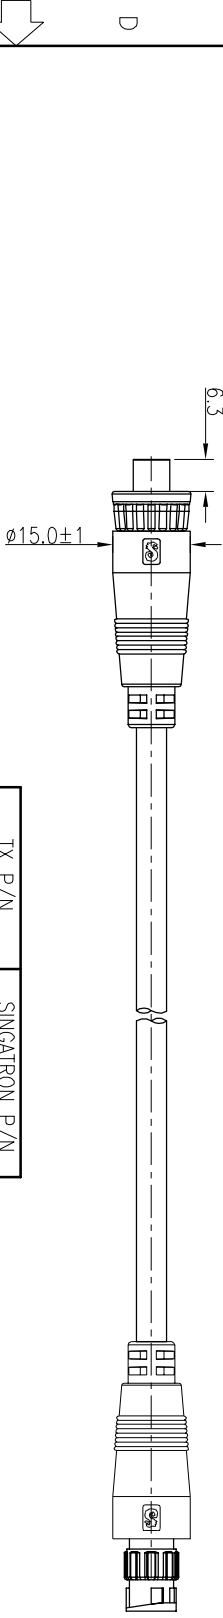


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A190220-2A		RZ	2019.11.18
B	ECN NO.:S202003-C01		Vcky	2020.03.03

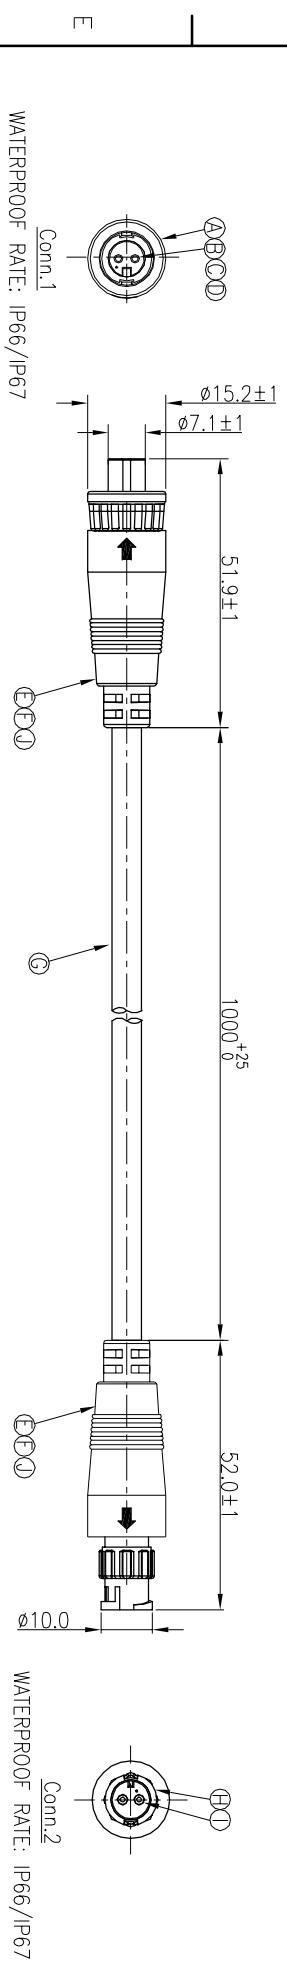

2	BLUE	2
1	BROWN	1
CONN.1 WIRE COLOR		CONN.2
PIN OUT		
CONN1		CONN2

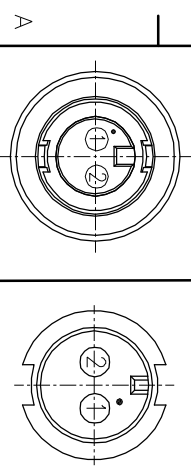

- NOTES:
1. WATERPROOF RATE: IP66/IP67
  2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE:-40° TO +105°  
CURRENT RATING: 10AMPS  
CONTACT RESISTANCE: 0.1 ohm (connector&soldering point)  
+0.0163 ohm/meter(cable)
  - INSULATION RESISTANCE: 100Mohm Min. at 500VDC  
BREAKDOWN VOLTAGE: 500 VAC PER MINUTE.
  3. SPECIFICATIONS:SEE"CIRCULAR SERIES SPECIFICATIONS".
  4. TO CONFORM TO ROHS REQUIREMENT AND REACH REGULATION
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **RoHS PASS**
  6. NON-HUMAN FACTORS CAUSE SERVICE LIFE IS 5 YEARS

J	HEAR SHRINK TUBE	2	Ø2.5 300V	BLACK
I	MALE PIN	2	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
H	BODY	1	PA66	BLACK
G	CABLE	1	UL21996 17AWG*2C OD:5.8mm	BLACK(PVC JACKET)
F	INNER MOLD	2	TPEE	NATURAL
E	OVER MOLD	2	PA66-FR370(F1)	BLACK
D	O-RING	1	SILICONE	RED
C	LOCK NUT	1	PA66	BLACK
B	FEMALE PIN	2	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信譽企業股份有限公司				
TITLE (CIRCULAR STANDARD SIZE) FEMALE CONN. FEMALE (2) PIN/10A				
DWN	Vcky	PART NO.	ZCN3004-W02402H	
CHKD	Cerry	SCALE	2:1	UNIT: mm
APVD	William	SIZE: A3	SHEET: 1 OF 1	REV: B
CUSTOMER COPY				