
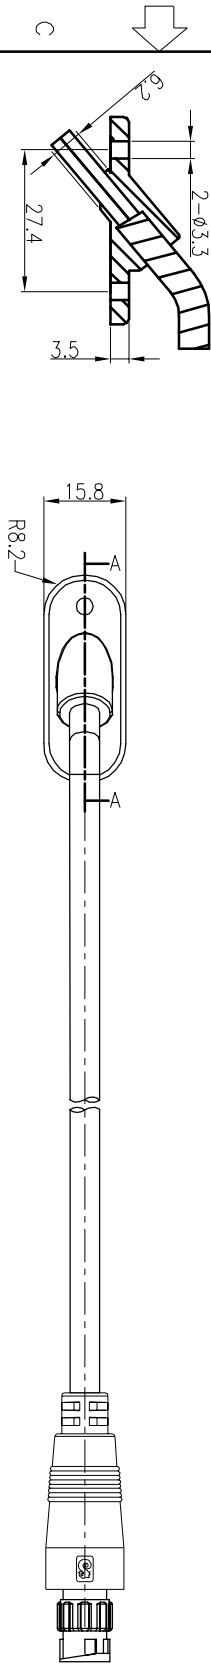
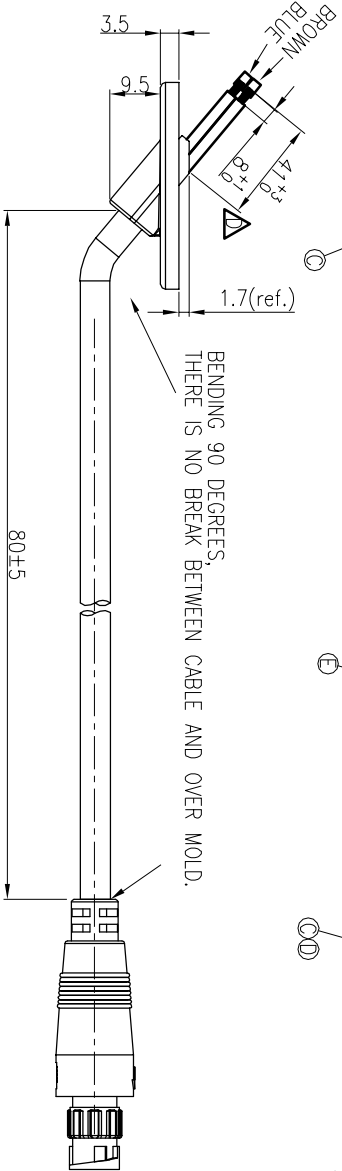


REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B	ECN NO.:S201911-C17	Wicky	2019.11.28
C	ECN NO.:S202003-C06	Wicky	2020.03.10
D	ECN NO.:S202003-C17	Wicky	2020.03.20

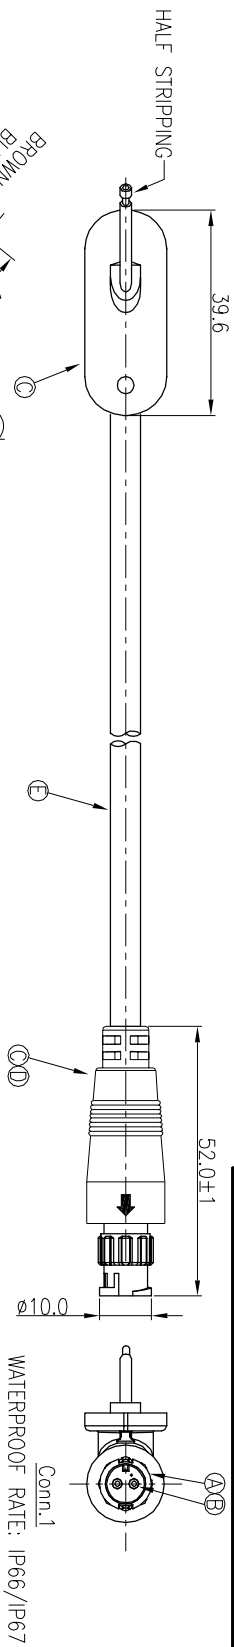

TX P/N	SINGATRON NO.
D30063858	ZCN3024-W02401H

- NOTES:
1. WATERPROOF RATE: IP66/IP67
  2. ELECTRICAL CHARACTERISTICS
  - TEMPERATURE RANGE: -40° TO +105°
  - CONTACT RESISTANCE: 0.1 ohm (connector&soldering point)  
+0.0163 ohm/meter(cable)

RATING: 60V AC/DC 10A

TEST CONDITION: DC300V 10Mohm 10ms

3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO ROHS REQUIREMENT AND REACH REGULATION
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
6. China RoHS, RoHS & REACH COMPLIANCE
7. NON-HUMAN FACTORS CAUSE SERVICE LIFE IS 5 YEARS

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	PA66	BLACK
B	MALE PIN	2	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
C	OVER MOLD	2	PA66-FR370(f1)	BLACK
D	INNER MOLD	1	TPPE	NATURAL
E	CABLE	1	UL21996 17AWG*2C OD:5.8mm	BLACK(PVC JACKET)

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
信營企業股份有限公司

TITLE: CIRCULAR MINI SIZE

DWN: Wicky

CHKD: Cerry

APVD: William

MALE CONN. MALE 2Pm(10A) LOCK TYPE

PART NO.:ZCN3024-W02401H

SCALE: 2:1

UNIT: mm

SIZE: A3

SHEET: 1 OF 1

REV: D



2	BLUE
1	BROWN
CONN.1 WIRE COLOR	
PIN OUT	
CONN1	

1

2

3

4

5

6

7

8

X# 信營 20-06-06-06-4

CUSTOMER COPY