



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2015.07.28

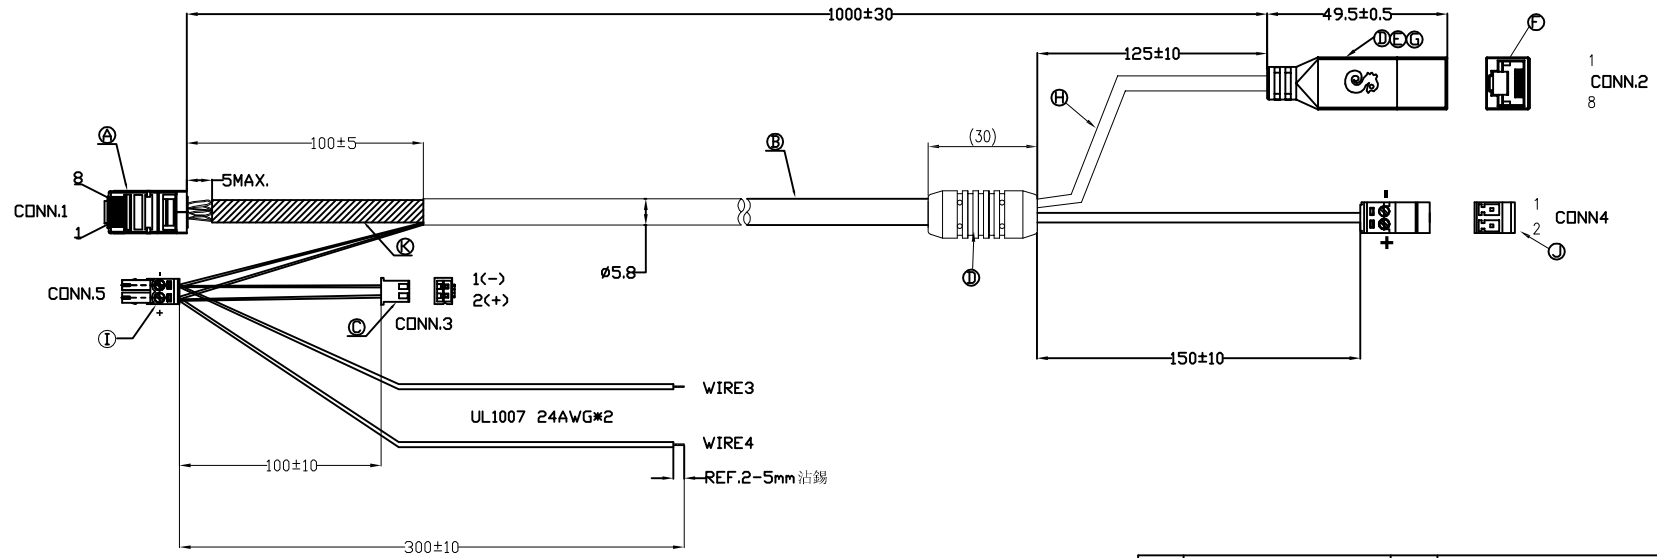

SPECIFICATIONS:

1. CONDUCT RESISTANCE:  $3\Omega$  Max.
2. INSULATION RESISTANCE:  $10M\Omega$  MIN. BY 250 VDC
3. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **[GP PASS]**
5. PACKING: SEE "2CT1501-W00001H" PACKAGE.
6. OTHER GENERAL SPEC. TO REFER "2CT1501-W00001H SPEC".

1	ORANGE/WHITE	1	Twist
2	ORANGE	2	
3	GREEN/WHITE	3	Twist
4	BLUE	4	
5	BLUE/WHITE	5	Twist
6	GREEN	6	
7	BROWN/WHITE	7	Twist
8	BROWN	8	
CONN.1	WIRF COLOR	CONN.2	

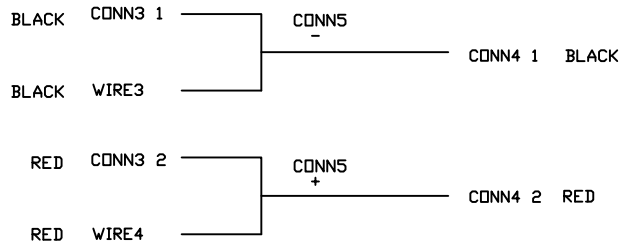

K	H.S.T	1	Ø5*10MM	BLACK
J	CONNECTOR(FEMALE)	1	MINI TERMINAL BLOCKS	GREEN
I	CONNECTOR(MALE)	1	MINI TERMINAL BLOCKS	GREEN
H	TUBE	1	PVC	BLACK
G	TUBE	10	300V 125°C	BLACK
F	CONNECTOR		RJ45 8P8C JACK 一体式	BLACK
E	INNER MOLD	1	PE	NATURAL
D	OVER MOLD	1	PVC	BLACK
C	CONNECTOR	1	TU3001HN0-02	WHITE
B	CABLE	1	20276 26AWG/4P+26AWG/2C	BLACK
A	RJ45 PLUG	8	COPPER ALLOY	GOLD FLASH
		1	PC	TRANSPARENT
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:		ANGLES:	TITLE CABLE	
X	:±0.5	X	:±2°	DWN
XX	:±0.3	XX	:±1°	CHKD
XXX	:±0.2			APVD
DWN		IVY-C 2015.07.28	PART NO. 2CT1501-W00001H	
CHKD		ANGELA 2015.07.28	SCALE: 1.4:1 UNIT: mm	
APVD		ANGELA 2015.07.28	SIZE: A3 SHEET: 1 OF 1 REV: A	
<b>CUSTOMER COPY</b>				