



REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150625-11B	JF	2016.07.30

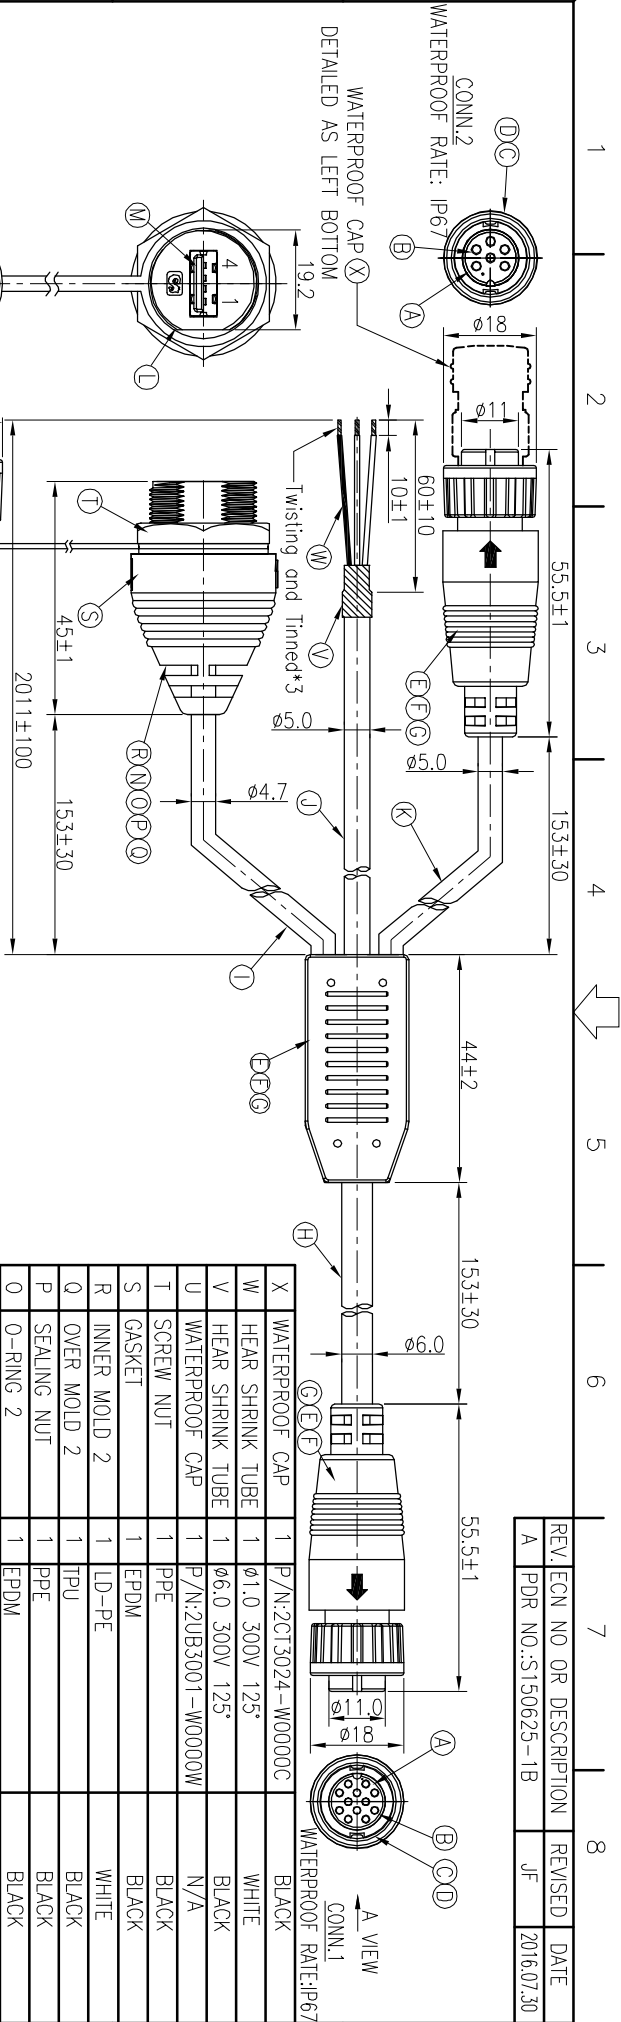

CONN.3
WATERPROOF RATE: IP67


NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 1A
3. OTHER GENERAL SPEC.: TO REFER CIRCULAR SERIES SPEC."
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. USB JACK INSERTION FORCE: 3.5KGf Max.
6. USB JACK WITHDRAW FORCE: 1.0KGf~2.5KGf
7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**



DRAIN	SHIELD	DRAIN	DRAIN	DRAIN
1	RED 24#	6	RED	12
4	BLACK 24#	1	BLACK	10
2	WHITE 28#	5	GREEN	7
3	GREEN 28#	4	WHITE	6
		2	BLUE	3
		3	ORANGE	4
		1	YELLOW	1

CABLE	CONN.3&WIRE COLOR	CONN.2&WIRE COLOR	CONN.1&WIRE COLOR
1	RED	6	RED
4	BLACK	1	BLACK
2	WHITE	5	GREEN
3	GREEN	4	WHITE
		2	BLUE
		3	ORANGE
		1	YELLOW

WATERPROOF CAP FOR FEMALE BODY



WATERPROOF CAP ASSEMBLED WITH CONN.2 FOR SHIP MENT



UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: X :±0.5 X :±2°
XX :±0.3 XX :±1°
XXX :±0.2 XXX :±1°

Singatron Enterprise Co., Ltd.
信營企業股份有限公司

CIRCULAR STANDARD SIZE (180 IP67) FEMALE CONN. FEMALE 12 PIN/LOCK TYPE
PART NO. 2CT3004-J12221H
SCALE 2:1 UNIT: mm
SHEET: 1 OF 1 REV: A

CUSTOMER COPY