



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150819-1A		JF	2015.08.18
B	ECN NO.:S150851-C		Vicky	2015.08.26

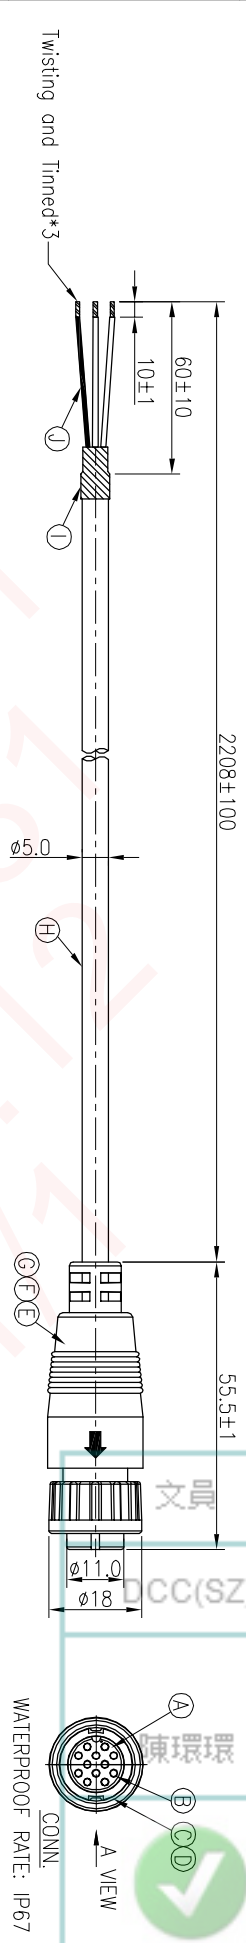

DRAIN	12
---	11
---	10
BLACK	9
---	8
---	7
---	6
RED	5
---	4
---	3
---	2
---	1
WIRE COLOR	CONN.
PIN OUT	
CONN.	



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 2A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

Pin Assignments
Front View
2CT3004-W12200

J	HEAR SHRINK TUBE	1	Ø1.0 600V 125°	WHITE
I	HEAR SHRINK TUBE	1	Ø6.0 300V 125°	BLACK
H	CABLE	1	UL2464 22AWG*2C+ +ADB OD5.0mm	BLACK (PVC JACKET)
G	HEAT SHRINK TUBE	3	Ø1.5	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	12	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

CIRCULAR STANDARD SIZE (180° IP67)
FEMALE CONN. FEMALE 12 PIN/LOCK TYPE

TITLE	DWN	CHKD	APVD
CIRCULAR STANDARD SIZE (180° IP67) FEMALE CONN. FEMALE 12 PIN/LOCK TYPE	Vicky	Harlen	Steve
PART NO. 2CT3004-112224H	SCALE 2:1	UNIT: mm	SIZE: A3
		SHEET: 1 OF 1	REV: B

CUSTOMER COPY