

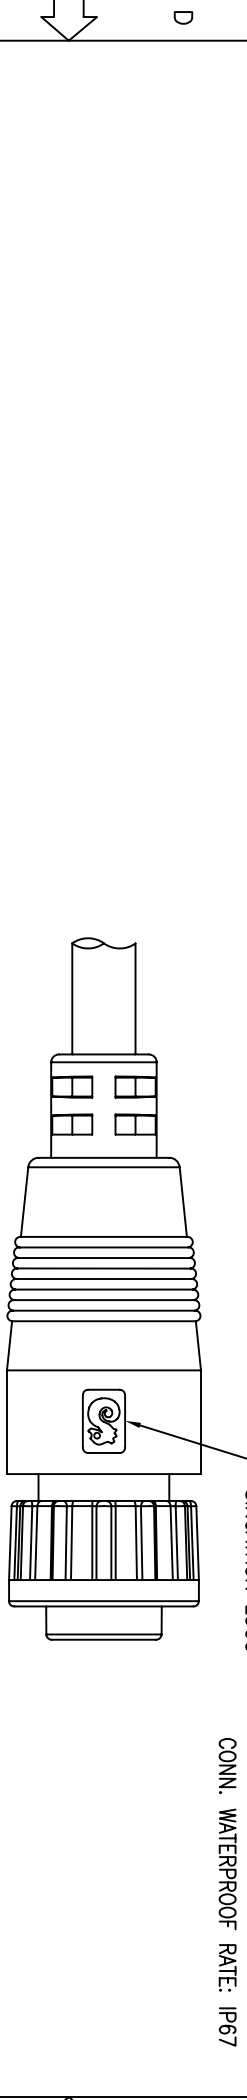


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO: S091009-3A	Horlen	2009.10.08

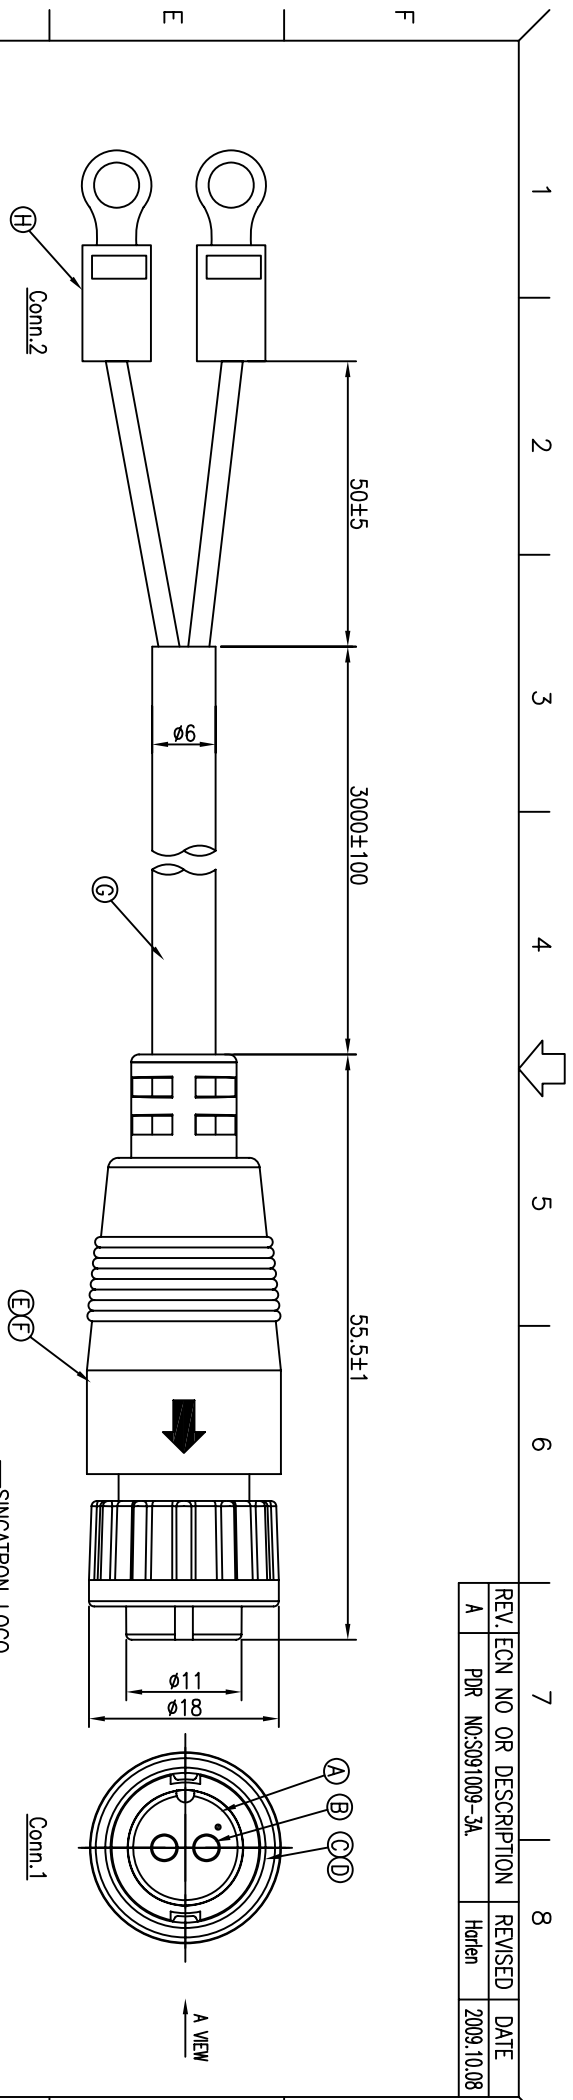

TERMINAL 2	BLACK	2 GND
TERMINAL 1	RED	1 VDD
CONN. 2	WIRE COLOR	CONN. 1
PIN OUT		



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: CABLE(-20°C TO +80°C)
CONNECTOR BODY(-40°C TO +105°C)
CURRENT RATING: 10A
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

A VIEW

H	TERMINAL	2	VINYL-INSULATED RING	BLUE
G	CABLE	1	UL2464 16AWG*2C (UV RESISTANT) OD=φ6.0	BLACK PVC JACKET
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	2	Phosphor Bronze Alloy C5441	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (IP67) FEMALE CONN. FEMALE 2PIN(10A) LOCK TYPE				
DWN: Hot/80.10.30 PART NO. 2CT3004-W02407				
CHKD: STE/6.10.30 SCALE 2:1 UNIT: mm				
APVD: Max/2009.10.30 SIZE: A3 SHEET: 1 OF 1 REV: A				
CUSTOMER COPY				

