

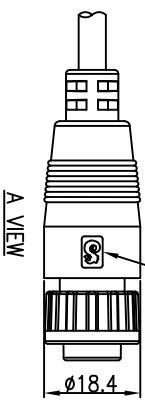



REV.	ECN NO OR DESCRIPTION	REVISION	DATE
A	PDR NO:S100812-3A	LILY	2010.08.23

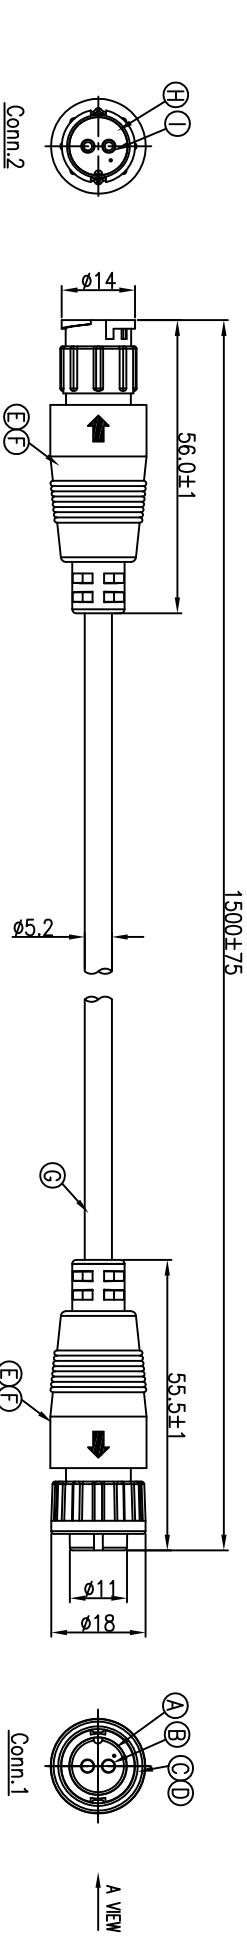

CONN. 2	WIRE COLOR	CONN. 1
2	BLACK	2
1	RED	1

PIN OUT

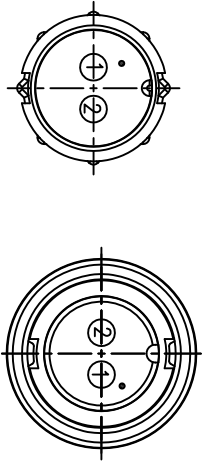

- NOTES:
1. WATERPROOF RATE: IP66
 2. CURRENT RATING: 10A
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

I	MALE PIN	2	HB159-1.5B	6u" GOLD PLATED OVER NICKEL PLATING
H	BODY	1	NYLON+33%GF	BLACK
G	CABLE	1	UL2464 18AWG*2C (UV RESISTANT) OD=φ5.2	BLACK(PVC JACKET)
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	2	Phosphor Bronze Alloy C5441	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1°
X.XX : ±0.2	

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. TO MALE CONN. LOCK TYPE

PART NO. 2CT3004-W02421

SCALE 2:1 UNIT: mm

SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY