



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO:S140526-8P	YF		2014.07.31

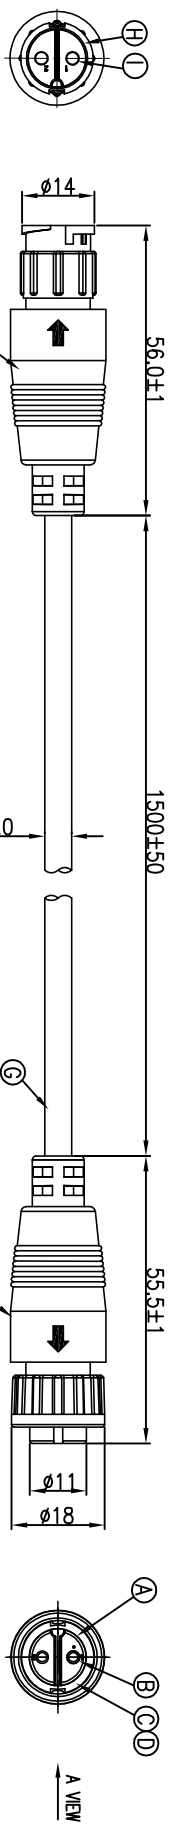

2	BLACK	2
1	BROWN	1
CONN.2 WIRE COLOR		CONN.1
PIN OUT		

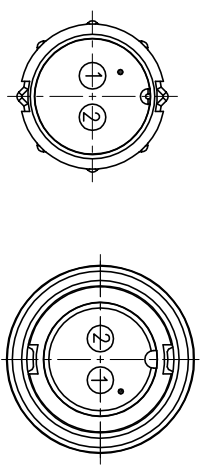

Pin Assignments Front View

Pin Assignments Front View

- NOTES:
1. WATERPROOF RATE: IP67
 2. IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 3. CURRENT RATING: 10A
 4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: Gr. Pass

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	MALE PIN	2	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
B	BODY	1	NYLON+GF	BLACK
C	CABLE	1	H05RN-F 2*1.0MM ² VDE ROHS	BLACK(PVC JACKET)
D	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
F	O-RING	1	EPDM	BLACK
G	LOCK NUT	1	NYLON+GF	BLACK
H	FEMALE PIN	2	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
I	BODY	1	NYLON+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.3 X.X :±1°

X.XX :±0.2 X.XX :±0.2

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (IP67) FEMALE CONN. TO MALE CONN. LOCK TYPE

DWN YF PART NO. 2CT3004-W02409H

CHKD Harden SCALE 2:1 UNIT: mm

APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY