

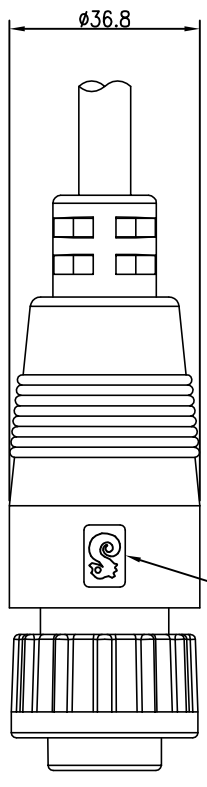



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO: S140526-7C		YF	2014.07.30

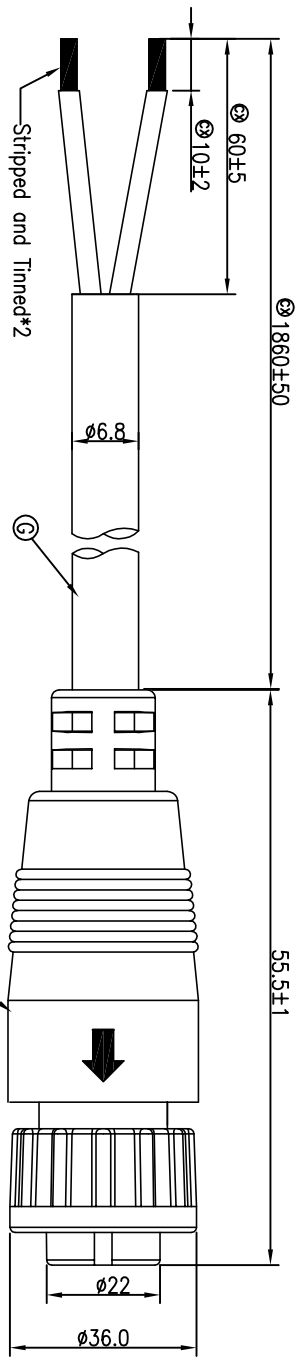

BLACK	2
RED	1
WIRE COLOR	CONN.
PIN OUT	
CONN.	



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. TEST CONDITIONS:
 - 2-1. CONDUCT RESISTANCE :3 Ohm Max.
 - 2-2. HI-POT TEST 1000VAC,5mA(1SEC)
 - 2-3. INSULATION RESISTANCE: 100M Ohm Min. BY 500V DC
 - 2-4. OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES SPEC".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: GR-PASS
 5. \varnothing REPRESENT CRITICAL DIMENSIONS.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	NYLON+30%GF	BLACK
B	FEMALE PIN	2	PHOSPHOR BRONZE C5210-EH	6u" GOLD PLATING OVER NICKEL PLATING
C	LOCK NUT	1	NYLON+30%GF	BLACK
D	O-RING	1	EPDM SHORE A 70'	BLACK
E	OVER MOLD	1	PVC(60P)	BLACK
F	INNER MOLD	1	TPU(S98A)	NATURAL
G	CABLE	1	ZR RW 2*1mm ² ø6.8mm	BLACK (PVC JACKET)

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
信晉企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)
TITLE MALE CONN. MALE 4PIN(10A) LOCK TYPE

DWN YF PART NO. 2CT93004-W02401H

CHKD Harden SCALE 2:1 UNIT: mm

APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY