

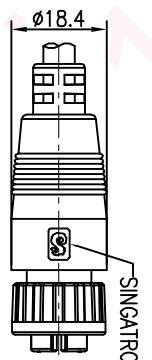


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.: S140610-3A		Vcky	2014.08.26
B	ECN NO.: S151236-C		Vcky	2015.12.16



WATERPROOF RATE: IP67

BLUE	2
BROWN	1
WIRE COLOR	CONN.
PIN OUT	

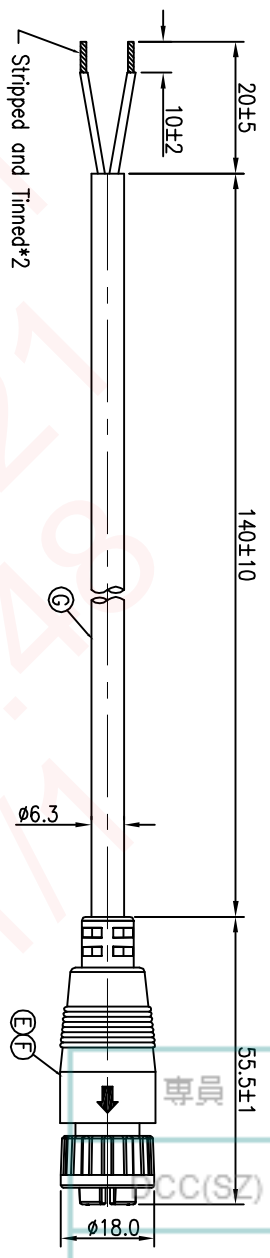

Pin Assignments
Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 MOhm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 1000 VAC PER MINUTE .
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +90°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - LIFE TEST: 1,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES GENERAL SPEC."
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: .

G	CABLE	1	HO5RN-F 2X0.75mm ² OD6.3	BLACK (PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+30%GF	BLACK
B	MALE PIN	2	HBS19-1.5B	1u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF	BLACK
NO	DESCRIPTION			PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (IP67) FEMALE CONN. FEMALE 2PIN(T04) LOCK TYPE				
DWN: Vcky PART NO. 2CT13004-W02402H				
CHKD: Harlen SCALE 1:1 UNIT: mm				
APVD: Steve SIZE: A3 SHEET: 1 OF 1 REV: B				
CUSTOMER COPY				