

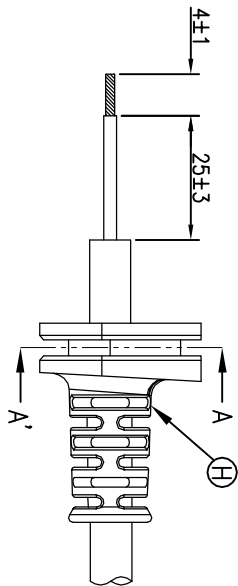



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T150421-3A	Harlen	2016.12.22

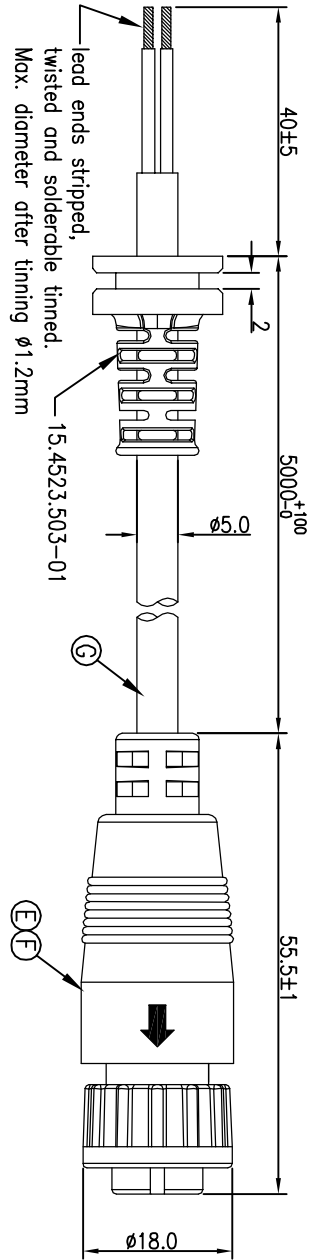

A VIEW

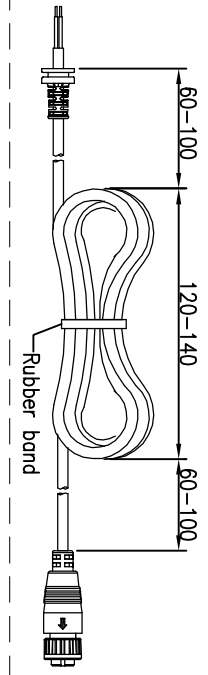


A-A' SECTION



A VIEW

Conn.
WATERPROOF RATE: IP67

GREEN (-)	2
RED (+)	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. TEST CONDITIONS:
2-1. CONDUCT RESISTANCE :3 Ohm MAX
2-2. HI-POT TEST 1000VAC,5mA(1SEC)
2-3. INSULATION RESISTANCE: 100MΩ MIN. BY 500 VDC
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

H	SR	1	PVC	BLACK
G	CABLE	1	UL2464 20AWG*2C +Al/Mv,Ø5.0(UV) 70P	BLACK (PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON	BLACK
B	FEMALE PIN	2	PHOSPHOR BRONZE	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. FEMALE 2PIN(T0A) LOCK TYPE

DWN: Harlen
CHKD: JF
APVD: Steve

PART NO. 2CT13004-W0241H
SCALE 2:1
UNIT: mm

SIZE: A3
SHEET: 1 OF 1
REV: A

CUSTOMER COPY