





REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S160808-4A	Vicky	2016.08.05

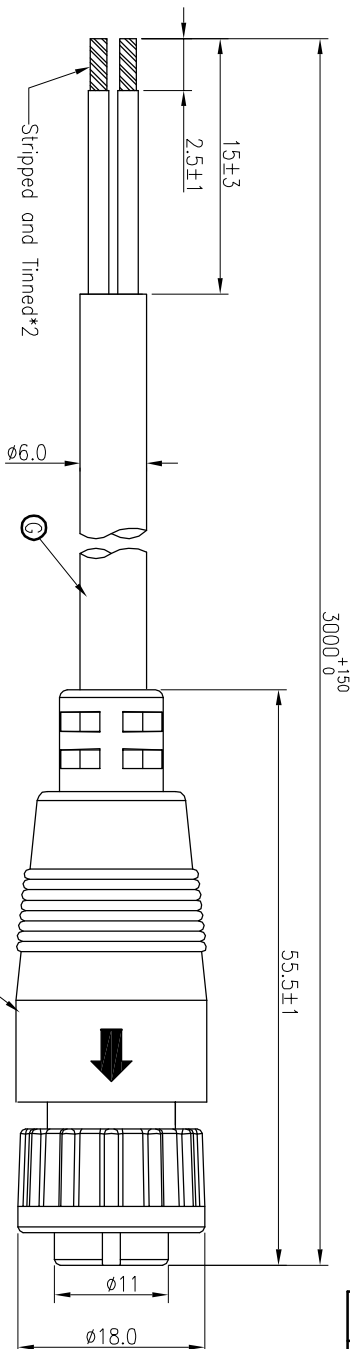

WATERPROOF RATE: IP67

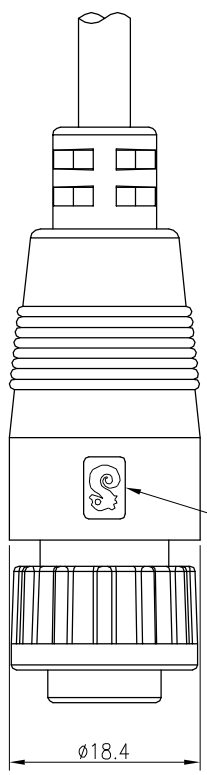

BLACK	2
RED	1
WIRE COLOR	CONN.
PIN OUT	
CONN.	



Pin Assignments
Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 Mohm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 1000 VAC PER MINUTE.
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES GENERAL SPEC".
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: .

G	CABLE	1	PVC UL2464 18#*2C+T(UV) OD=φ6.0	BLACK (PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+30%GF	BLACK
B	FEMALE PIN	2	PHOSPHOR BRONZE	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信善企業股份有限公司				
TITLE CIRCULAR STANDARD SIZE (P67)				
FEMALE CONN. FEMALE 2PIN(10A) LOCK TYPE				
DWN	Vicky	PART NO.:	2CT3004-W024B7H	LOCK TYPE
CHKD	Horlen	SCALE:	2:1	UNIT: mm
APVD	Steve	SIZE:	A3	SHEET: 1 OF 1
REV: A				
CUSTOMER COPY				