

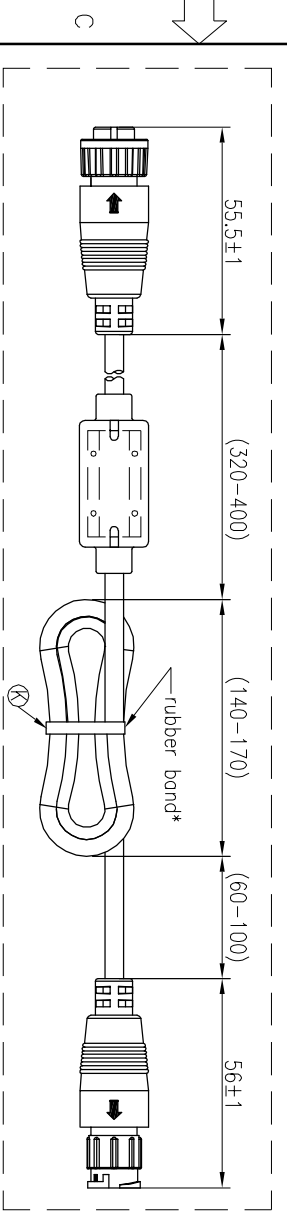


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PDR NO:T180409-3A	Jun	2019.06.12

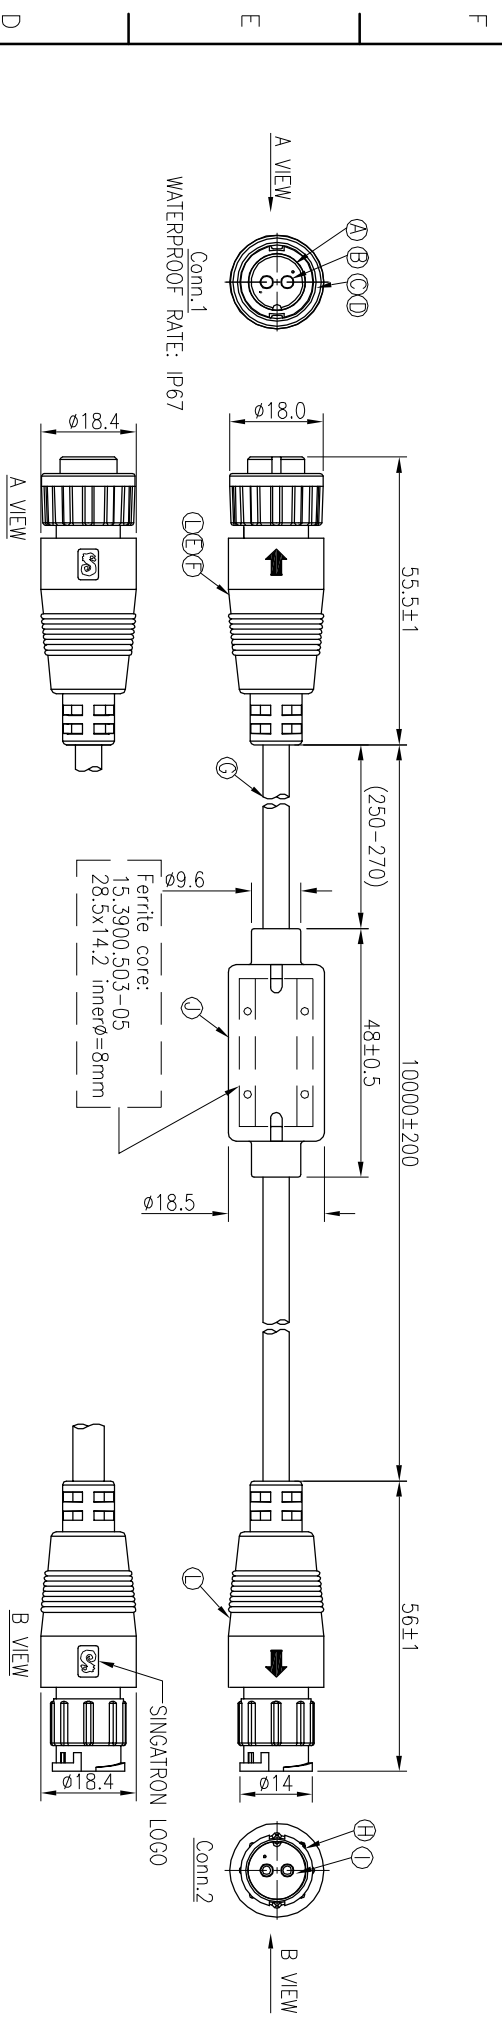


2	GREEN(-)	2
1	RED(+)	1
CONN.1 WIRE COLOR		CONN.2
PIN OUT		
Conn.1		Conn.2

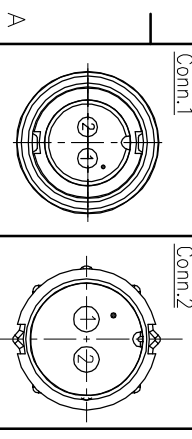

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. TEST CONDITIONS:
2-1. CONDUCT RESISTANCE :3 Ohm MAX
2-2. HI-POT TEST 1000VAC,5mA(1SEC)
2-3. INSULATION RESISTANCE: 100MOhm MIN. BY 500 VDC
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:



L	HEAT SHRINK TUBE	4	φ2.5 125°C 300V	BLACK
K	RUBBER BAND	1	φ25*7	BLACK
J	CORE	1	T5B RH14.2*28.5*8	
I	MALE PIN	2	BRASS	6u" GOLD PLATED
H	BODY	1	PA6+30%GF	BLACK
G	CABLE	1	UL2464 20AWG*2C +AI/My,φ5.0(UV) 70P	BLACK (PVC JACKET)
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON	BLACK
B	FEMALE PIN	2	PHOSPHOR BRONZE	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE CIRCULAR STANDARD SIZE (LOCK TYPE)				
DWN	Jun	PART NO.2CT3004-W024C7H		
CHKD	Gerry	SCALE 1:1	UNIT: mm	
APVD	William	SIZE: A3	SHEET:1 OF 1	REV: A
CUSTOMER COPY				