

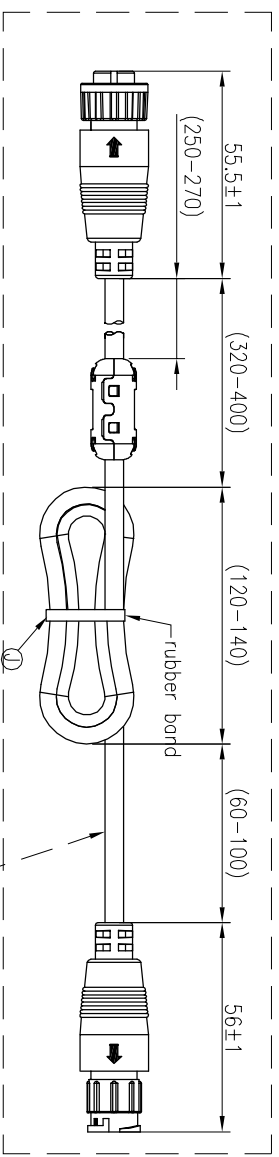


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T181213-2A		Jun	2019.03.26
B	ECN NO.:S202004-C13		Jul	2020.05.15

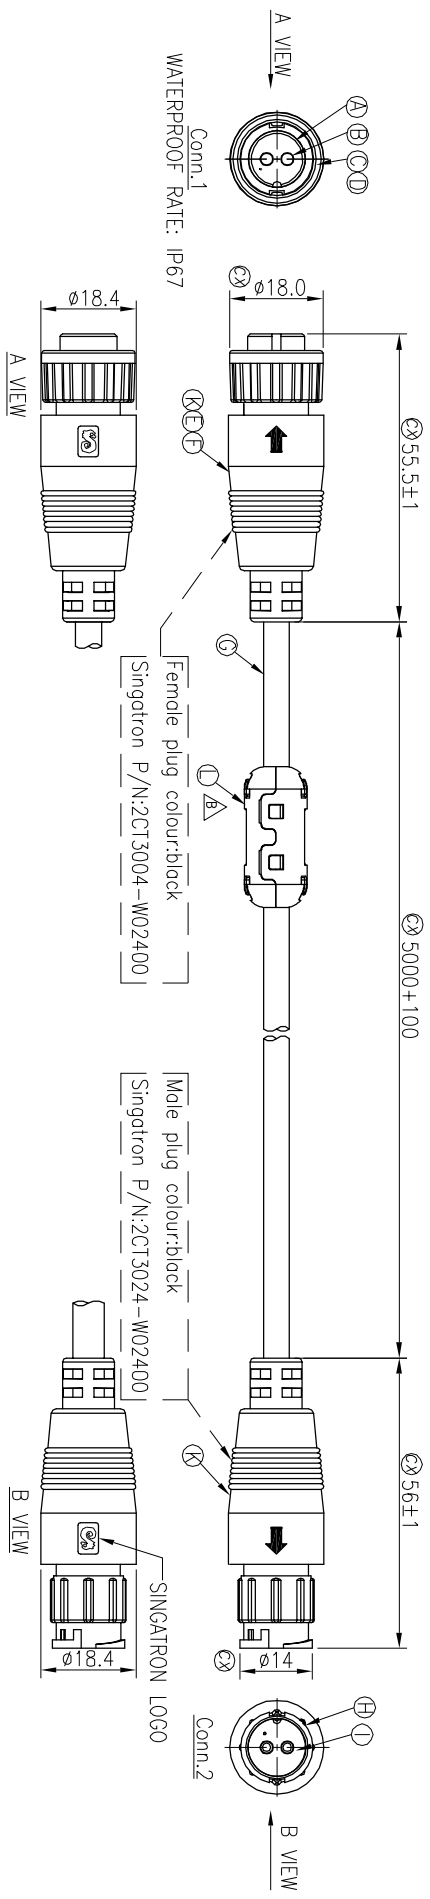

2	GREEN(-)	2
1	RED(+)	1
CONN.1 WIRE COLOR		CONN.2
PIN OUT		
Conn.1		Conn.2

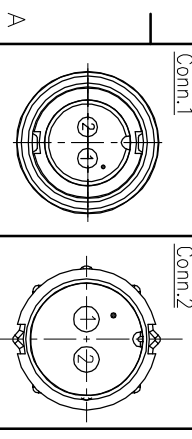

[E309807 R AWM 2464 20AWG VW-1  
80°C 300V cR AWM I A 80°C 300V FT1 ZHT]

NOTES:

1. WATERPROOF RATE: IP67
2. TEST CONDITIONS:  
2-1. CONDUCT RESISTANCE :3 Ohm MAX  
2-2. HI-POT TEST 1000VAC,5mA(1SEC)  
2-3. INSULATION RESISTANCE: 100MOhm MIN. BY 500 VDC
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS."
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
6. REPRESENT CRITICAL DIMENSIONS.

TABLE

ITEM	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
L	CORE	1	28A0593-0A2	BLACK
K	HEAT SHRINK TUBE	4	Ø2.5 125°C 300V	BLACK
J	RUBBER BAND	1	Ø25*7	BLACK
I	MALE PIN	2	HB159 G1	6u" GOLD PLATED
H	BODY	1	NYLON66+33%GF	BLACK
G	CABLE	1	2464 20#(26/0.16TS/2C) +AI/MY,0D:5.0(UV)	BLACK (PVC JACKET)
F	INNER MOLD	2	TPU BASF S98A	NATURAL
E	OVER MOLD	2	PVC 60P VW-1	BLACK
D	O-RING	1	EPDM SHORE A 70°	BLACK
C	LOCK NUT	1	NYLON66+33%GF	BLACK
B	FEMALE PIN	2	C5210-EH 0.3T G2	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON66+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.  
信登企業股份有限公司

TITLE CIRCULAR STANDARD SIZE (LOCK TYPE)  
FEMALE CONN. MALE 2 PIN (10A)

DWN Jy PART NO.2CT3004-W024DIH

CHKD Gerry SCALE 1:1 UNIT: mm

APVD William SIZE: A3 SHEET:1 OF 1 REV:B

CUSTOMER COPY