


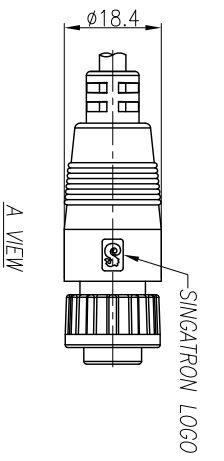
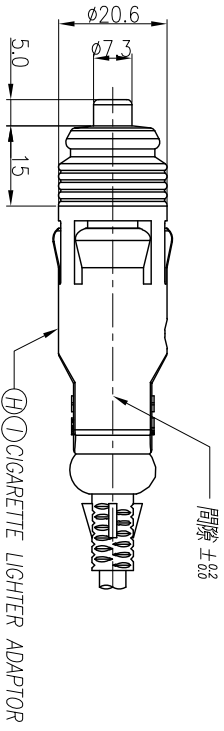



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T101006-8A	Glen	2011.03.24

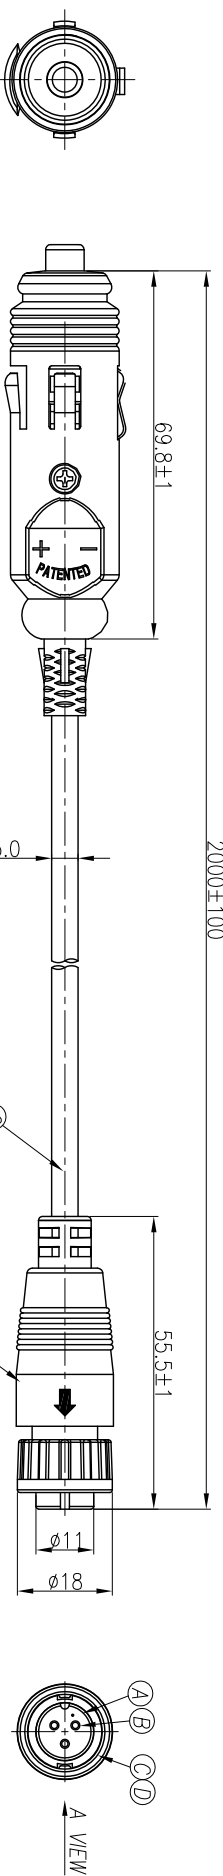

WATERPROOF RATE: IP67



Drain	3	
-	BLACK	2
+	RED	1
ADAPTOR WIRE COLOR	CONN.	
PIN OUT		



NOTES:

1. WATERPROOF RATE: IP67
2. IMMERSSED IN 1M WATER FOR 30 MINUTES
3. CURRENT RATING: 250V 1A
4. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS"
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

J	LABEL	1	2"*1.437" LABEL	WHITE
I	UV GLUE	1	N/A	NATURAL
H	ADAPTOR	1	CERAMIC TUBE FUSE 1A SLOW BLOW (TANG YANG)	N/A
G	CABLE	1	UL2464 22AWG*2C+AL D+B(UV) 0D5.0	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	3	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信普企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. FEMALE SPIN(SA) LOCK TYPE

TITLE: DWN: CHKD: APVD: Part No. 2CT3004-W03305H
Glen Steve Quon
SCALE 1:1 UNIT: mm
SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY