

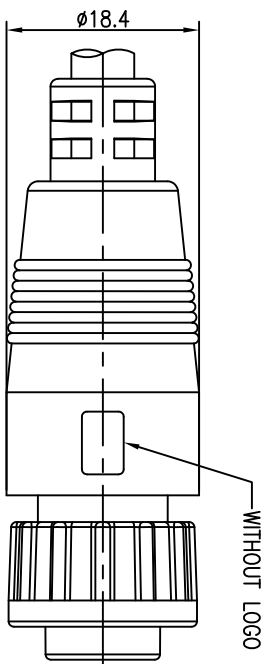


| REV. | ECN NO. | OR DESCRIPTION | REVISED | DATE |
|------|----------|----------------|---------|------------|
| A | PDR NO.: | S100513-2A | Shown | 2010.07.20 |

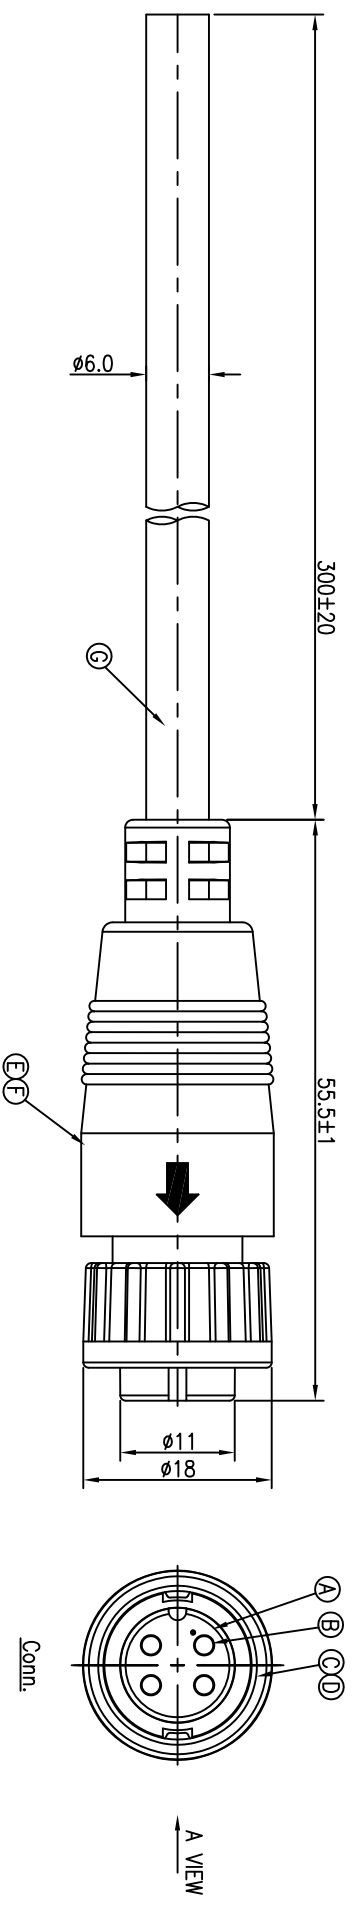

| | |
|------------|-------|
| BLACK | 4 |
| BLUE | 3 |
| GREEN | 2 |
| RED | 1 |
| WIRE COLOR | CONN. |
| PIN OUT | |
| CONN. | |



- NOTES:
1. WATERPROOF RATE: IP65
 2. CURRENT RATING: 5A
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

| NO | DESCRIPTION | QTY | MATERIAL | PLATING & COLOR |
|----|-------------|-----|---|--------------------------------------|
| A | BODY | 1 | NYLON+GF | BLACK |
| B | FEMALE PIN | 4 | PHOSPHOR BRONZE | GOLD PLATING 6U" ALL OVER Ni 60u" |
| C | LOCK NUT | 1 | NYLON+GF | BLACK |
| D | O-RING | 1 | EPDM | BLACK |
| E | OVER MOLD | 1 | PVC | BLACK |
| F | INNER MOLD | 1 | TPU | NATURAL |
| G | CABLE | 1 | UL2464 24AWG*4C (UV RESISTANT) OD=6.0 | BLACK PVC JACKET |

| DECIMALS: | ANGLES: |
|-------------|-----------|
| X : ±0.5 | X : ±2° |
| X.X : ±0.3 | X.X : ±1° |
| X.XX : ±0.2 | |

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信營企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (IP65)
FEMALE CONN. FEMALE 4PIN(SA) LOCK TYPE

DWN: Shown PART NO. 2CT3004-W04307
CHKD: Steve SCALE 2:1 UNIT: mm
APVD: Max SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY