



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S160713-34	Vicky	2016.07.13

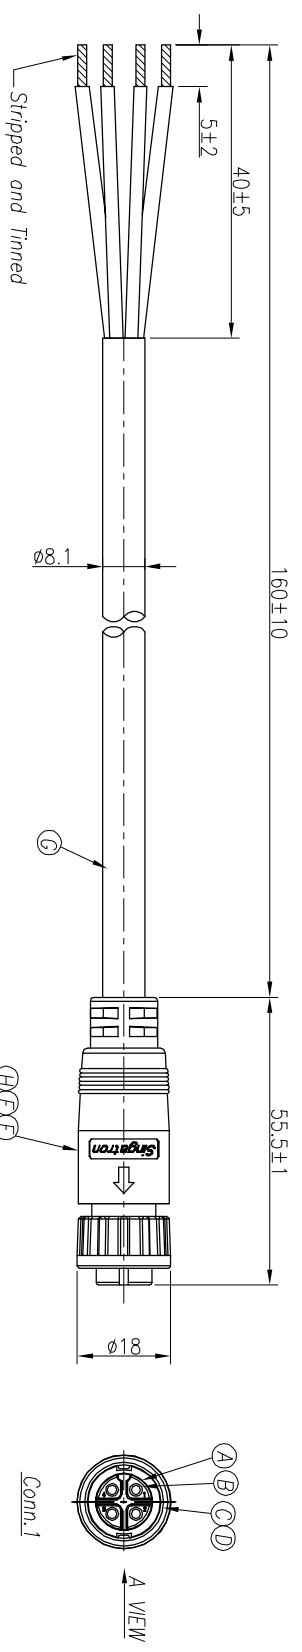


CONN. WATERPROOF RATE: IP67

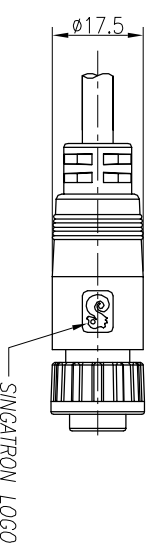

A VIEW

BROWN	4
BLUE	3
BLACK	2
YELLOW/GREEN	1
WIRE COLOR	CONN:1
PIN OUT	



Pin Assignments

Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 MOhm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 500 VAC PER MINUTE .
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - LIFE TEST: 1,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER"IRCULAR SERIES GENERAL SPEC."
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **RoHS**.

H	HEAT SHRINK TUBE	4	125* 300V Ø3.0	BLACK
G	CABLE	1	IEC 60245 57(YZW) 4x1.0mm ² ØØ8.1	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66	BLACK
B	FEMALE PIN	4	PHOSPHOR BRONZE	(1~3)µ" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (IP67) FEMALE CONN. FEMALE 4PIN(T04) LOCK TYPE				
DMN	Vicky	PART NO.	2CT3004-W04368H	
CHKD	Horten	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY				