

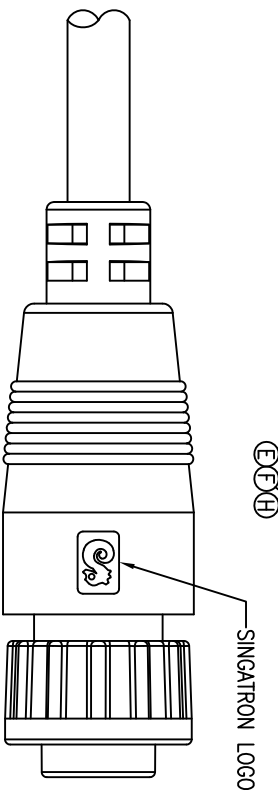



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.S100722-1A	LILY		2010.08.24
B	ECN NO.S110922	LILY		2011.10.25
C	ECN NO.S130585	JF		2013.05.30

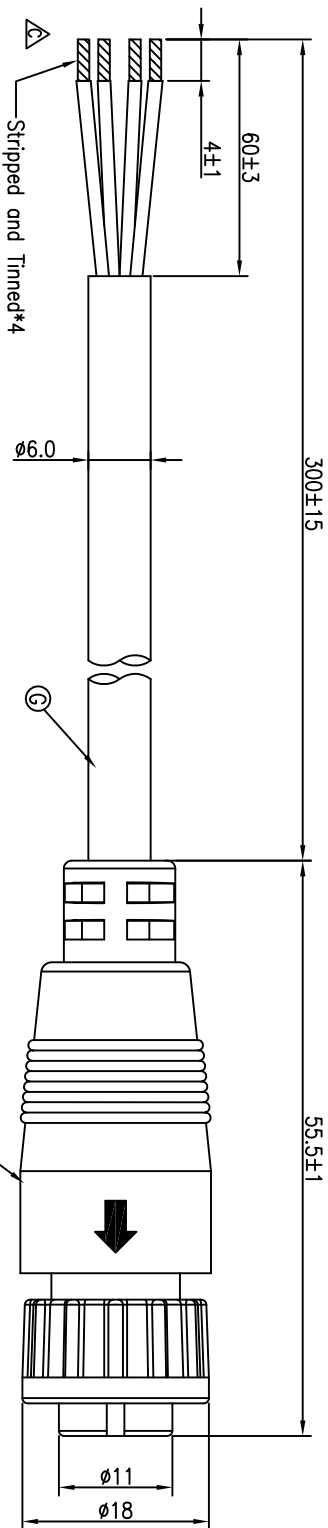


A VIEW

YELLOW	4
GREEN	3
BLACK	2
RED	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP66
 2. CURRENT RATING: 10A
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	PA66+30%GF 94V-0	BLACK
B	FEMALE PIN	4	Phosphor Bronze	1u" GOLD PLATING OVER NICKEL PLATING
C	LOCK NUT	1	PA66+30%GF 94V-0	BLACK
D	O-RING	1	EPDM	BLACK
E	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	ABS 94V-0	NATURAL
G	CABLE	1	UL2464 18AWG*4C+T (UV) OD=6.0	BLACK (PVC JACKET)
H	SHRINK TUBE	1	φ2.0/L=6mm,VW-1/300V	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
 X :±0.5 X :±2°
 X.X :±0.3 X.X :±1°
 X.XX :±0.2 X.XX :±0.2

 Singatron Enterprise Co., Ltd.
 信譽企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (IP66) FEMALE CONN. FEMALE 4PIN(10A) LOCK TYPE

DWN: JF PART NO. 2CT3004-W04418

CHKD: Harten SCALE 2:1 UNIT: mm

APVD: Quon SIZE: A3 SHEET: 1 OF 1 REV: C

CUSTOMER COPY