REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140519-3C	YF	2014.06.10

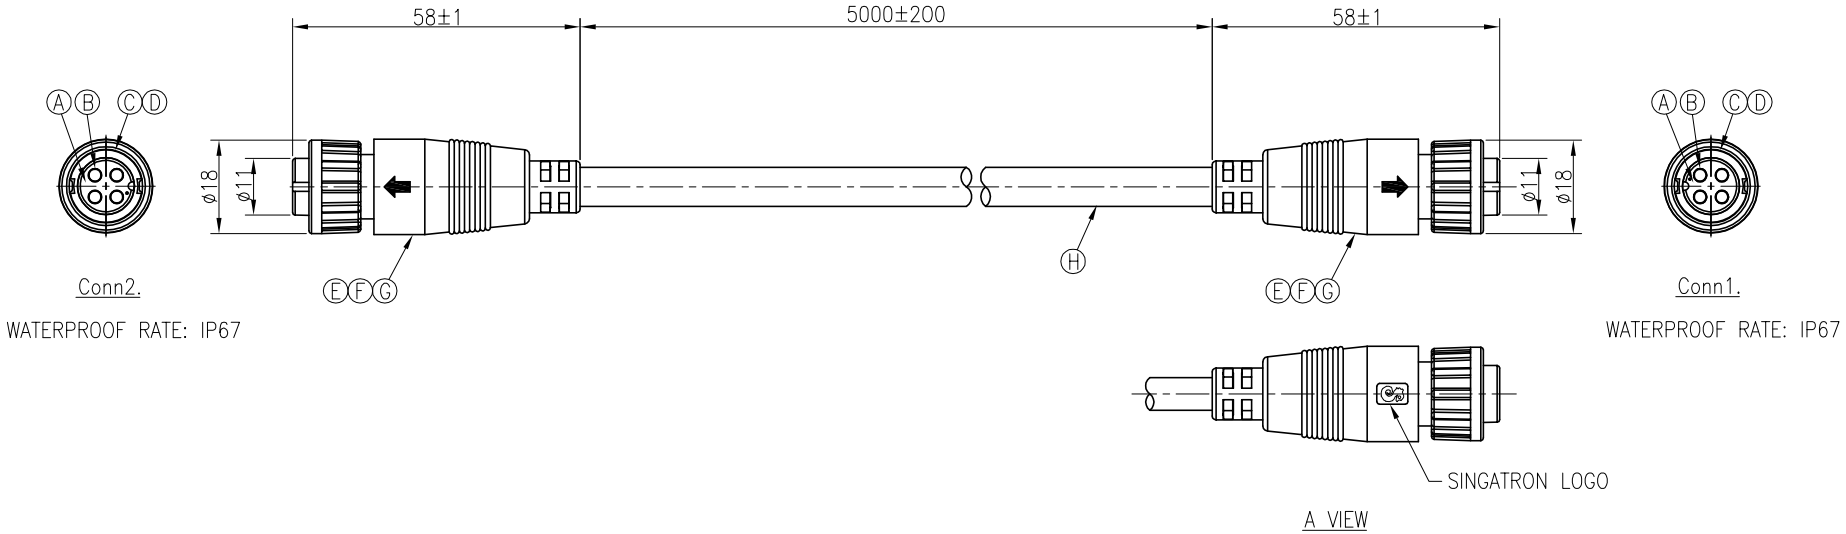

4	YELLOW	4
2&3	BLUE	2&3
	BLACK	
1	RED	1
CONN2.	WIRE COLOR	CONN1.

PIN OUT

CONN1&2.



Pin Assignments

Front View

NOTES:
1. WATERPROOF RATE: IP67
   IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 10A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
H	CABLE (客供)	1	H05RR-F 4*0.75mm² ø7.8 UV	BLACK
G	HEAR SHRINK TUBE	8	ø3.0 300V 125°	BLACK
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	2	EPDM	BLACK
C	LOCK NUT	2	PA66+GF	BLACK
B	FEMALE PIN	8	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	2	PA66+GF	BLACK

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5, X.X :±0.3, X.XX :±0.2

ANGLES: X :±2°, X.X :±1°

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	CIRCULAR STANDARD SIZE (IP67) FEMALE CONN. FEMALE 4 PIN LOCK TYPE			
DWN	YF	PART NO.2CT3004-W04483H		
CHKD	Harlen	SCALE 1:1	UNIT: mm	
APVD	Quan	SIZE: A3	SHEET:1 OF 1	REV: A

CUSTOMER COPY

文件編號RD-06-043-A