
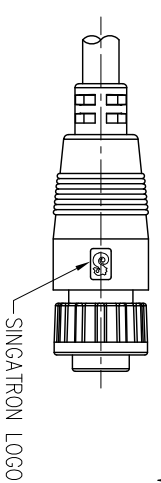
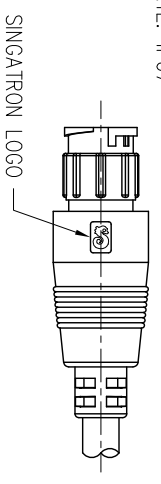



REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	SI40919-7D	YF	2014.11.04

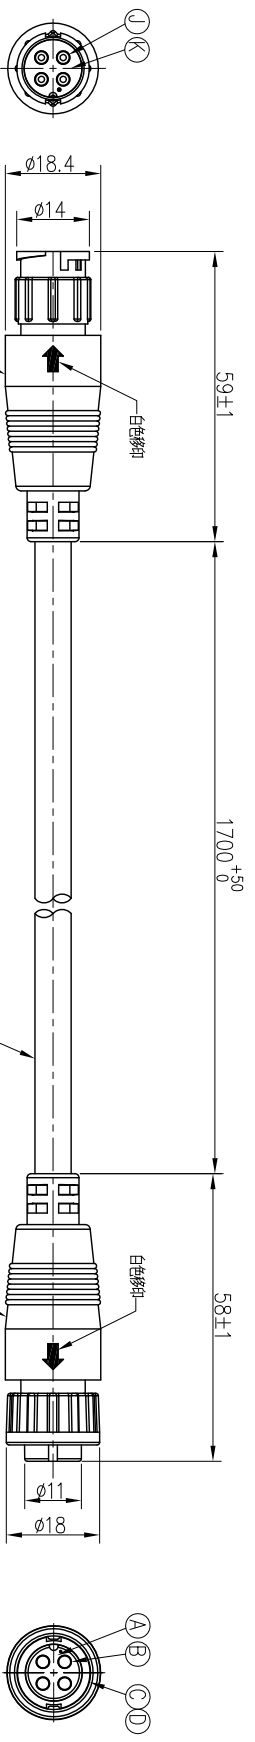

WATERPROOF RATE: IP67

WATERPROOF RATE: IP67

4	YELLOW	4
2&3(SHORT)	BLUE	2&3(SHORT)
	BLACK	
1	RED	1
CONN2.	WIRE COLOR	CONN1.
PIN OUT		

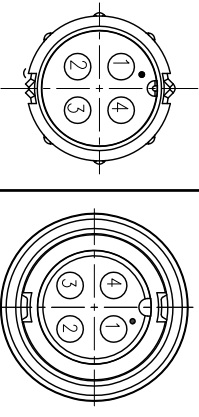

Pin Assignments  
Front View

CUSTOMER P/N	SINGATRON P/N
K3: 3.104718.41.810	2CT3004-W044A2H

- NOTES:
1. WATERPROOF RATE: IP67  
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
  2. CURRENT RATING: 10A
  3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
K	MALE PIN	4	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
J	BODY	1	NYLON66+30%GF	BLACK
H	CABLE (客件)	1	H05RR-F 4*0.75mm <sup>2</sup>	BLACK
G	HEAR SHRINK TUBE	8	Ø3.0 300V 125°	BLACK
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	4	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:  
X : ±0.5 X : ±2°  
X.X : ±0.3 X.X : ±1'  
X.XX : ±0.2

Singatron Enterprise Co., Ltd.  
信營企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)  
FEMALE CONN. FEMALE 4 PIN LOCK TYPE

PART NO. 2CT3004-W044A2H

SCALE 1:1 UNIT: mm

SHEET: 1 OF 1 REV: A

CUSTOMER COPY