

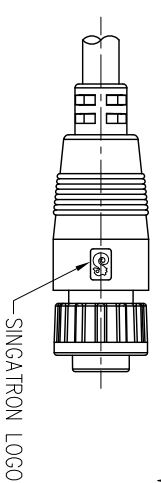
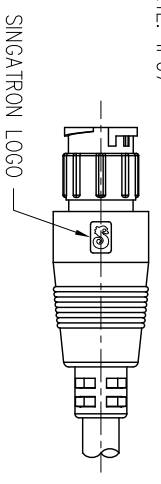


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S141020-10A	Yong-Hui	2014.12.22

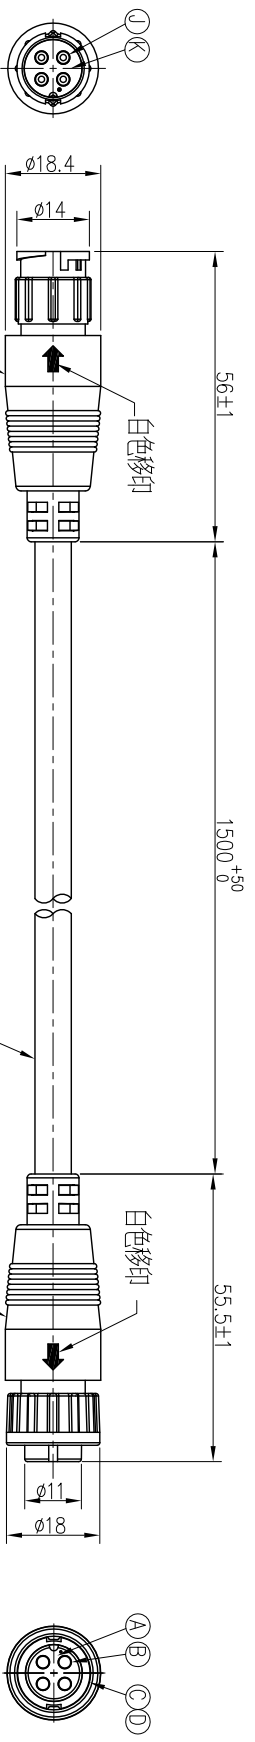

4	YELLOW	4
2&3(SHORT)	BLUE	2&3(SHORT)
1	GREEN	1
CONN2.	RED	CONN1.
WIRE COLOR		
PIN OUT		
CONN2.		CONN1.

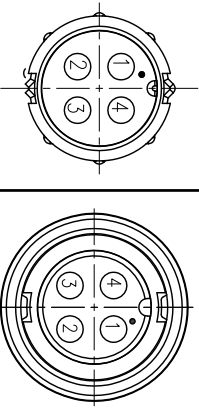

CUSTOMER P/N	SINGATRON P/N
K31.310.478.41.814	2CT3004-W044A8H

- NOTES:
1. WATERPROOF RATE: IP67
 2. CURRENT RATING: 10A
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

Pin Assignments	Front View
Pin Assignments	Front View

K	MALE PIN	4	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
J	BODY	1	NYLON66+30%GF	BLACK
H	CABLE (客#)	1	4*0.5mm ² φ6.3	BLACK
G	HEAR SHRINK TUBE	4	φ3.0 300V 125°	BLACK
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	4	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1'
X.XX : ±0.2	X.XX : ±10.2

Singatron Enterprise Co., Ltd
信營企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. FEMALE 4 PIN LOCK TYPE

DWM	Yong-Hui	PART NO.:	2CT3004-W044A8H
CHKD	JF	SCALE	1:1
APVD	Harlen	SIZE:	A3
		SHEET:	1 OF 1
		REV:	A

CUSTOMER COPY