



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S160114-12C	Vicky	2015.11.12

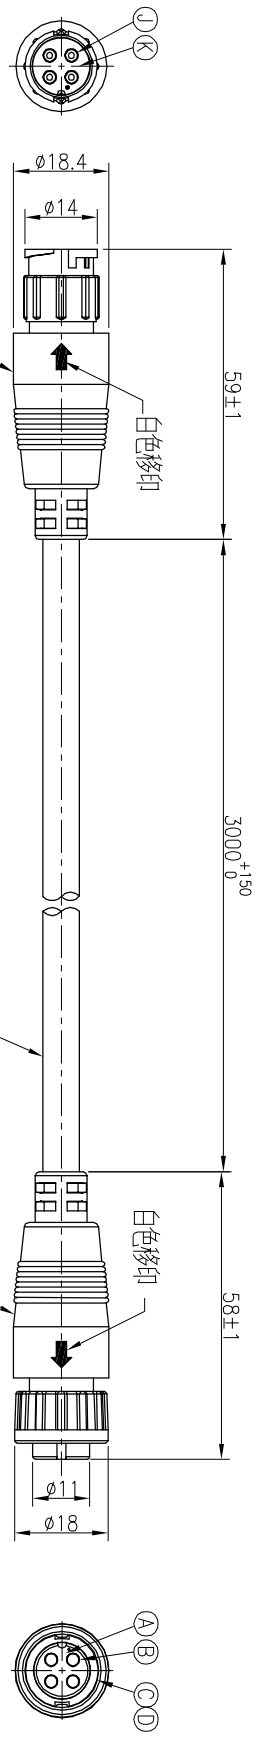

4	YELLOW	4
3	BLUE	3
2	BLACK	2
1	RED	1
CONN2. WIRE COLOR		CONN1.
PIN OUT		

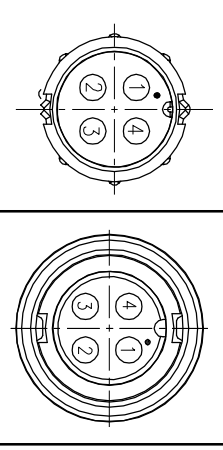

CUSTOMER P/N	SINGATRON P/N
K31310471841867	2CT3004-W044D2H

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 10A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

L	WIRE	2	UL1007 24AWG L=30	BLACK
K	MALE PIN	4	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
J	BODY	1	PA66+30%GF	BLACK
H	CABLE (客户提供)	1	H05RR-F 4*0.75mm ² ø7.8mm	BLACK
G	HEAR SHRINK TUBE	8	ø3.0 300V 125°	BLACK
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	4	Phosphor Bronze CS210-EH 0.3T	(1~3)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. FEMALE 4 PIN LOCK TYPE

PART NO. 2CT3004-W044D2H

SCALE 1:1 UNIT: mm

SHEET: 1 OF 1 REV: A

CUSTOMER COPY