

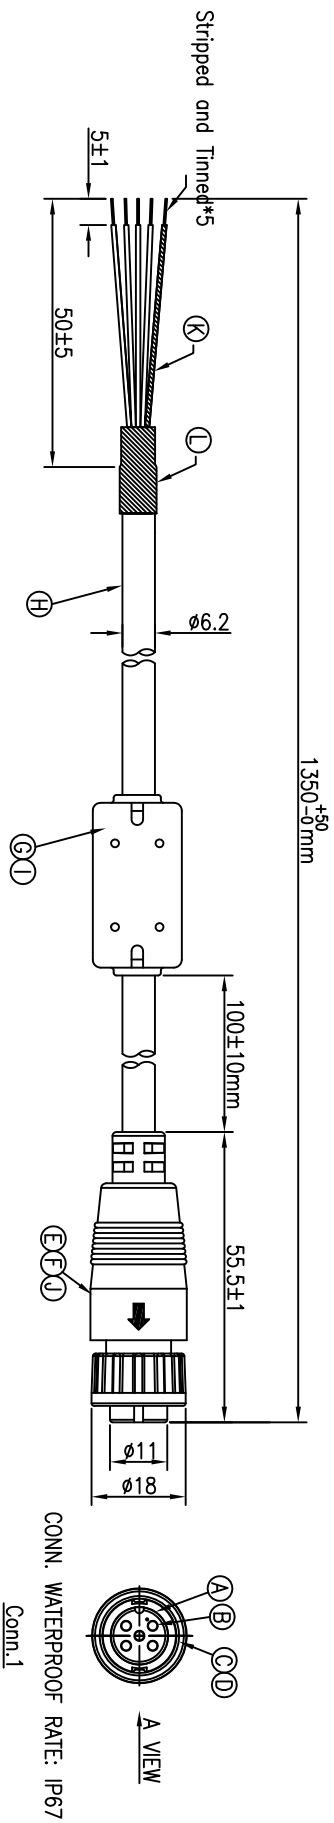



REV. ECN NO OR DESCRIPTION	REVISED DATE
A PDR NO. T100722-2A Harlen	2010.08.3

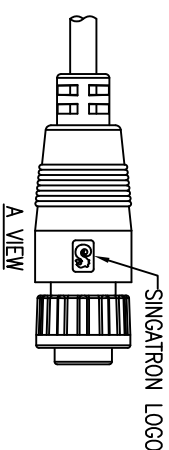

CONN. WATERPROOF RATE: IP67
Conn.1



DRAIN	5
ORANGE	4
RED	3
BROWN	2
BLACK	1
WIRE COLOR	CONN.
PIN OUT	



NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 5A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

L	HEAR SHRINK TUBE	1	Ø7.0 L=20 300V 125'	BLACK
K	HEAR SHRINK TUBE	1	Ø1.0 L=50 300V 125'	BLACK
J	HEAR SHRINK TUBE	1	Ø1.0 L=10 300V 125'	BLACK
I	OVER MOLD	1	PVC	BLACK
H	CABLE	1	UL2517 20AWG*4C+ D+AL(UV) OD6.2	BLACK(PVC JACKET)
G	CORE	1	Ø14.2*Ø8.0*28.5	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	5	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5 X :±2'	X.X :±0.3 X.X :±1'
X.XX :±0.2	X.XX :±0.2

Singatron Enterprise Co., Ltd.
信安企业股份有限公司
CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. FEMALE 5 PIN(S) LOCK TYPE
PART NO. 2CT3004-W05309
SCALE 1:1 UNIT: mm
SHEET: 1 OF 1 REV: A

CUSTOMER COPY