

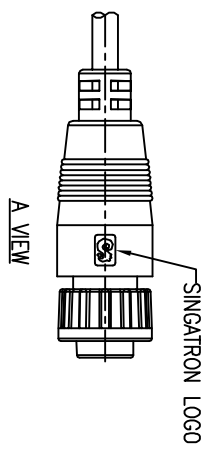


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S131125-5D	Shown	2014.05.06	

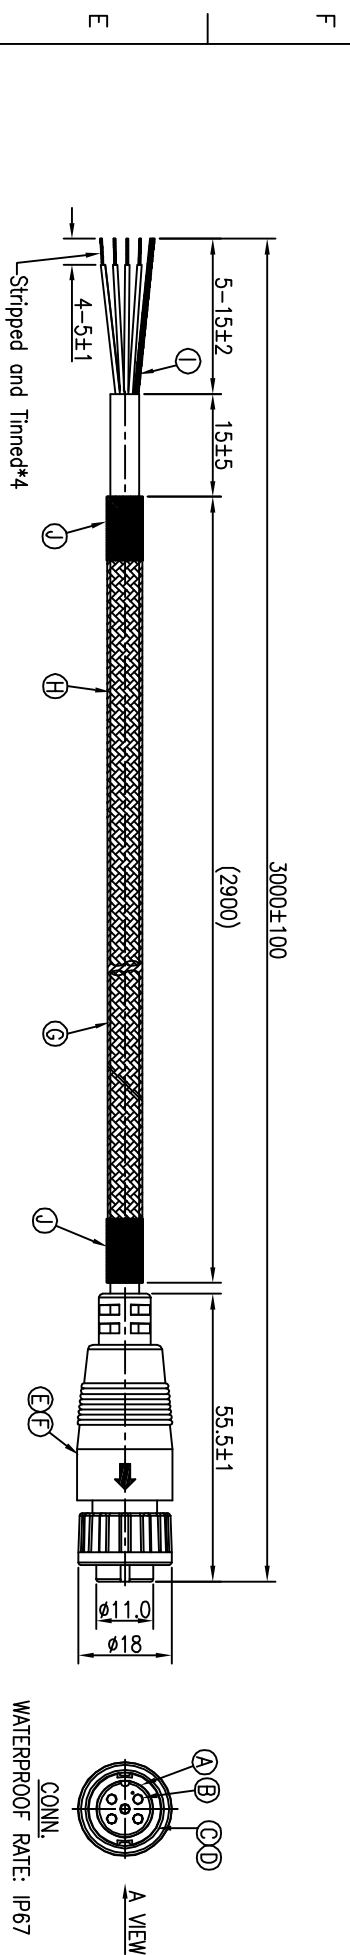


WATERPROOF RATE: IP67

D

D

WHITE	5
BLACK	4
RED	3
GREEN	2
DRAIN	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 5A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	NYLON+33%GF	BLACK
B	FEMALE PIN	5	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
C	LOCK NUT	1	NYLON+33%GF	BLACK
D	O-RING	1	EPDM	BLACK
E	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	TPU	NATURAL
G	MESH LOOM	1	NYLON	BLACK
H	CABLE	1	UL2095 26AWG*4C+D+ P/N: 30419A0000	BLACK(PVC JACKET)
I	HEAT SHRINK TUBE	1	W20 T0.12 L50 Ø1.0 300V 12S*	BLACK
J	ACETATE TAPE	2	W20 T0.12 L50	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X .0:0.5 X :±2
X.X :±0.3 X.X :±1'
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

TITLE CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. FEMALE 5 PIN(SA) LOCK TYPE

DWN Shown PART NO.2CT3004-W05323H-AC

CHKD Harden SCALE 1:1 UNIT: mm

APVD Quon SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY

1 2 3 4 5 6 7 8