

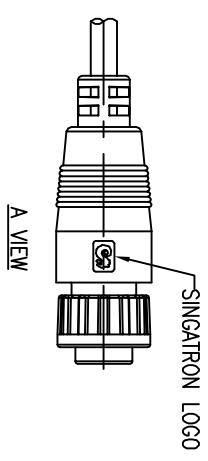
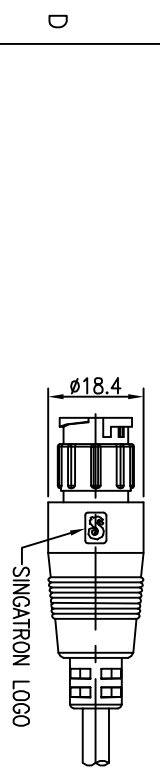


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PDR NO.:S131125-5C	Shown	2014.05.06

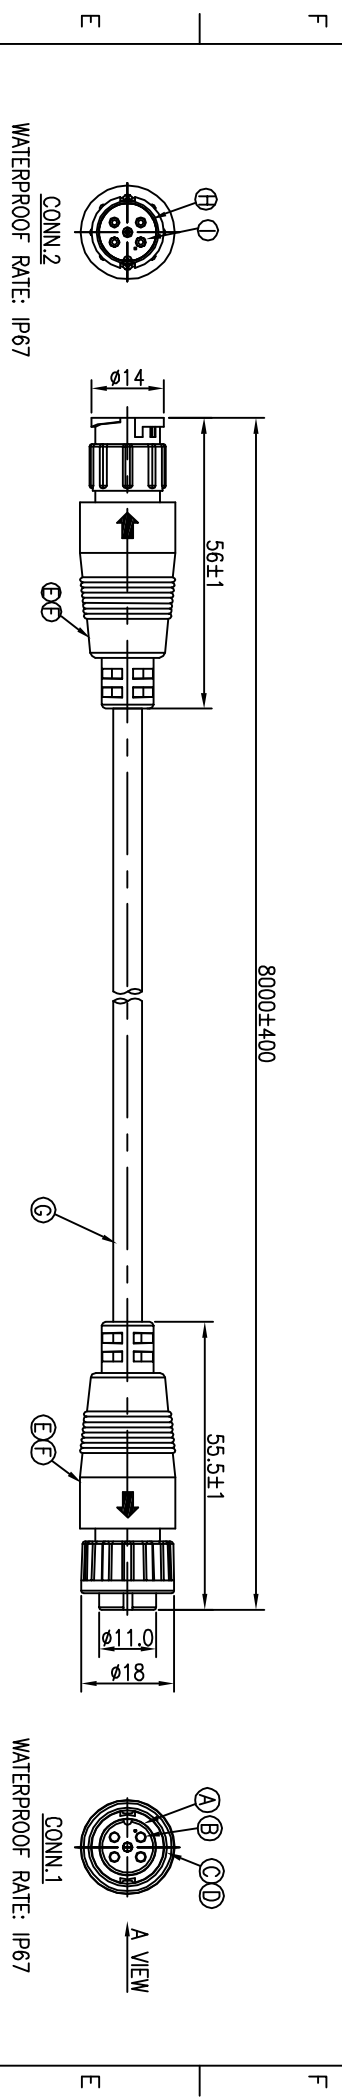

5	WHITE	5
4	BLACK	4
3	RED	3
2	GREEN	2
1	DRAIN	1
CONN.2 WIRE COLOR		CONN.1
PIN OUT		

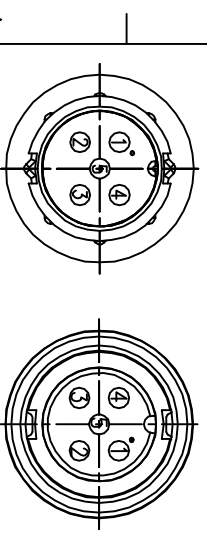

Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 5A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

I	MALE PIN	5	HB159-1.5B	6u" GOLD PLATING OVER NICKEL PLATING
H	BODY	1	NYLON+33%GF	BLACK
G	CABLE	1	UL2464 20AWG*4C+D +AL(V) OD=5.5 P/N: 30435A0009	BLACK(PVC JACKET)
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	5	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (IP67) FEMALE CONN+MALE CONN 5 PIN(SA) LOCK TYPE				
DWN	Shown	PART NO.2CT3004-W05524H-AC	SCALE 1:1	UNIT: mm
CHKD	Harlen	SIZE: A3	SHEET:1 OF 1	REV: A
APVD	Quon	CUSTOMER COPY		