

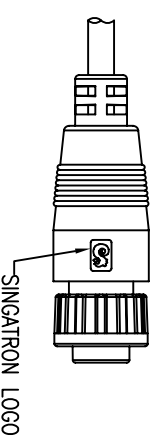


REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T090714-1A	Steve	2009.07.13

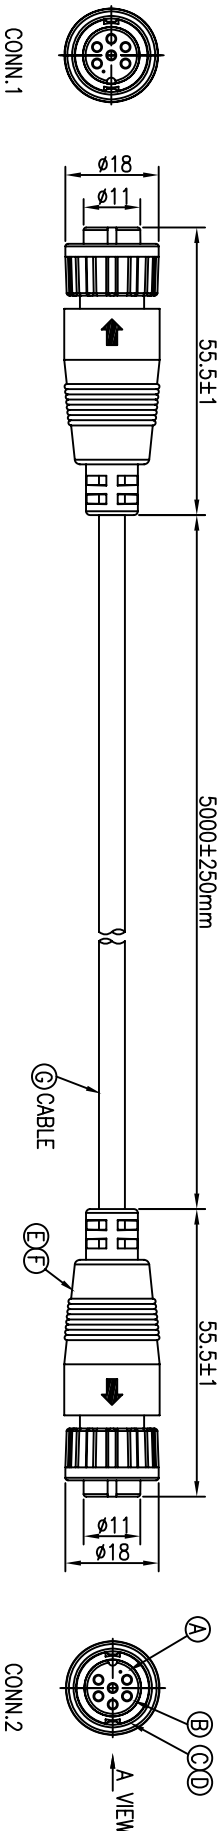


- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

6	WHITE	6
5	RED	5
4	BLACK	4
3	YELLOW	3
2	GREEN	2
1	BLUE	1
WIRE COLOR		CONN.2
PIN OUT		CONN.1

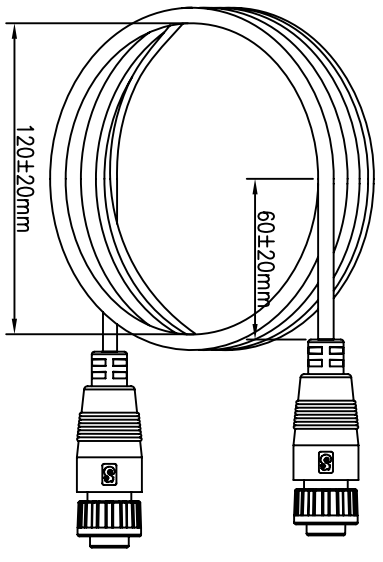

The Whole wound cable should be wrapped with PE film

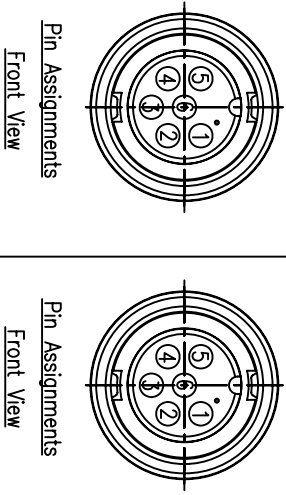

G	CABLE	1	UL2464 24#*6C+A, UV RESISTANT	BLACK PVC JACKET
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	2	EPDM	BLACK
C	LOCK NUT	2	NYLON+33%GF	BLACK
B	FEMALE PIN	12	Phosphor Bronze Alloy C5441	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	2	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (LOCK TYPE)
FEMALE CONN. FEMALE 6PINS(SA)

DWN Steve PART NO.2CT3004-M06301
CHKD Quon SCALE 2:1 UNIT: mm
APVD Max SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY