

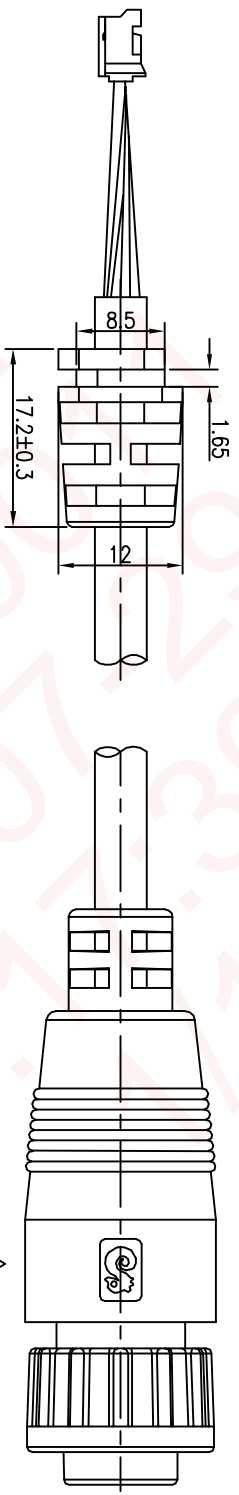


2000±100

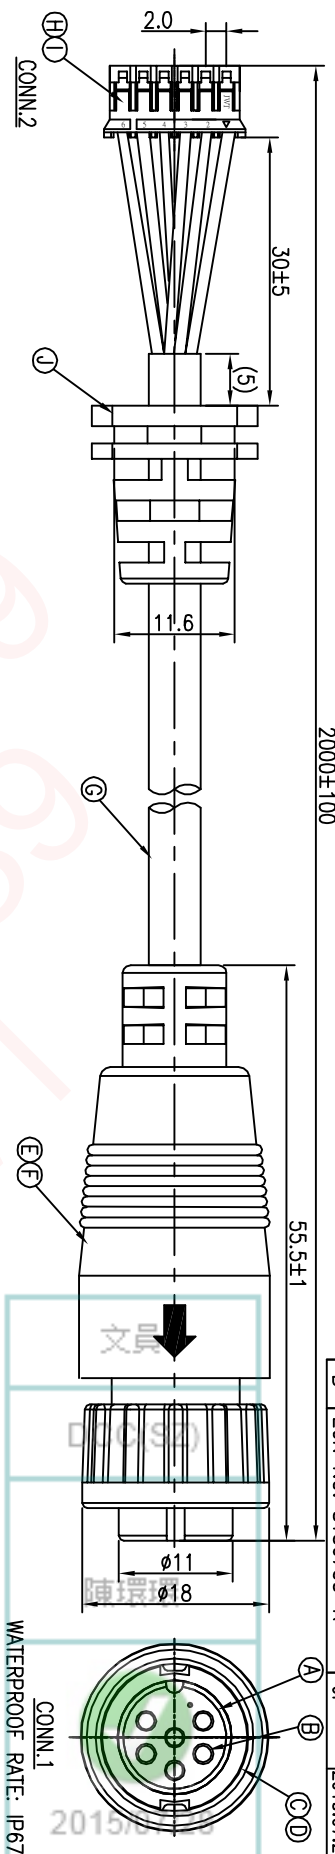

1	WHITE	6
2	BLUE	5
3	GREEN	4
4	YELLOW	3
5	RED	2
6	BLACK	1
WIRE COLOR		CONN.2
PIN OUT		CONN.1

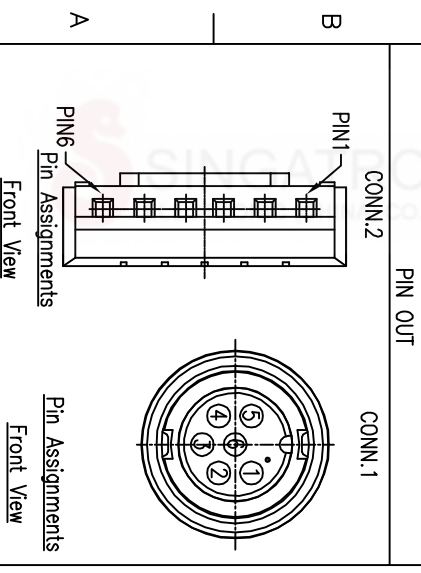

- NOTES:
1. WATERPROOF RATE: IP67
 2. CURRENT RATING: 5A
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO. TT30827-3A	JF		2014.02.19
B	ECN NO. S150755-R	JF		2015.07.28

J	SR	1	PVC	BLACK
I	TERMINAL	6	BRASS	TI-PLATED
H	HOUSING	1	NYLON66 U194V-0	WHITE
G	CABLE	1	UL2464 24AWG*6C+ AI/MY(UV RESISTANT) OD=φ5.0	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	6	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (180° IP67) LOCK TYPE
FEMALE CONN. FEMALE PIN 6 PIN(GA)

DWN JF PART NO. 2CT3004-W06318H
CHKD Yang SCALE 2:1 UNIT: mm

APVD Harlen SIZE: A3 SHEET: 1 OF 1 REV: B

CUSTOMER COPY