




REV: A	E/CN NO OR DESCRIPTION	PDR NO.:A190715-4A	REVISED	DATE
			JY	2019.08.07

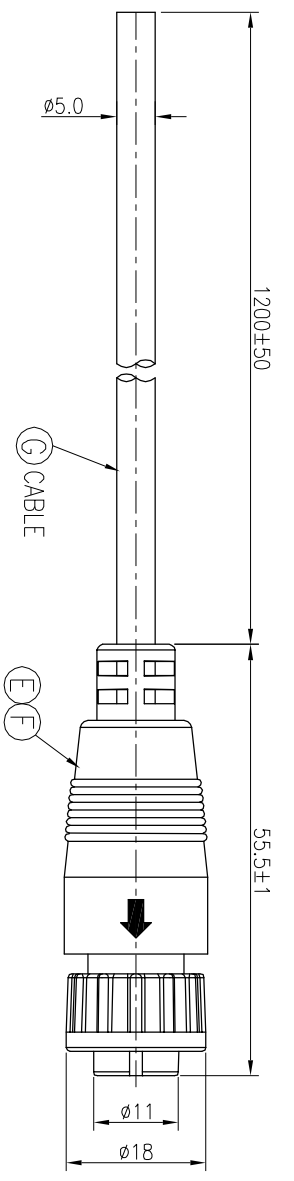


CONN. WATERPROOF RATE: IP67

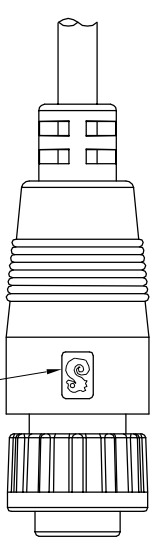

A VIEW
SINGATRON LOGO

6	WHITE
5	RED
4	BLACK
3	YELLOW
2	GREEN
1	BLUE
CONN.1	WIRE COLOR
CONN.1	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
 2. CABLE JACKET MATERIAL:BLACK PVC
 3. TEST CONDITIONS:
 - 3-1. CONDUCTIANCE RESISTANCE: 3 Ohm MAX
 - 3-2. HI-POT TEST 1000VAC/10A, 500VAC/5A OR 2A 5mA(1SEC)
 - 3-3. INSULATION RESISTANCE: 100MΩ MIN. BY 500V DC
 - 3-4. OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES SPEC".
 4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	CABLE	1	UL2464 24#*6C+A	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT		NYLON+GF	BLACK
B	FEMALE PIN	6	Phosphor Bronze	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

DECIMALS:	ANGLES:	TITLE	CIRCULAR STANDARD SIZE (180° IP67)
X :±0.5	X :±2'	DMN	Jy
XX :±0.3	XX :±1'	CHKD	Cerry
X:XX :±0.2		APVD	William
PART NO.2CT3004-W06338H			
SCALE 2:1 UNIT: mm			
SIZE: A3 SHEET:1 OF 1 REV: A			
CUSTOMER COPY			