



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S161205-7A	Yang	2017.06.25

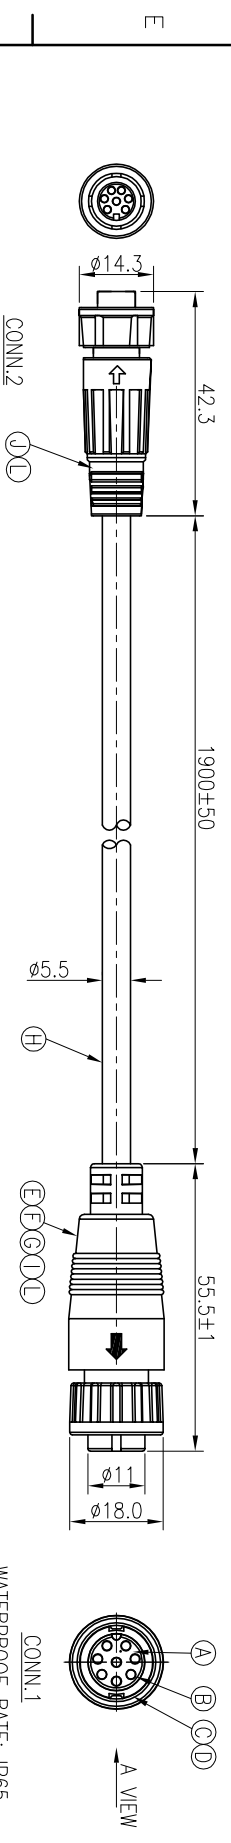

7	YELLOW(UL1015 24AWG)	7
6	DRAIN	8
5	GREEN	3
4	BLUE	6
3	ORANGE	4
2	RED	5
1	BROWN	1
	BLACK	2
	WIRE COLOR	CONN.1
PIN OUT		
	CONN.2	CONN.1

SHORT

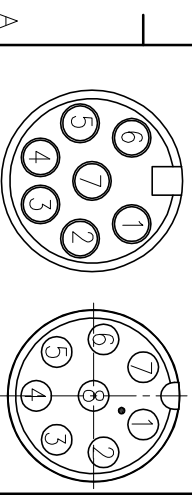

- NOTES:
1. CONN.1 WATERPROOF RATE: IP65
 2. CURRENT RATING: 2A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

L	HEAT SHRINK TUBE	2	125° 300V	BLACK
K	WIRE	1	UL1015 24AWG	YELLOW
J	FEMALE CONN.	1	21007223-1	N/A
I	LIQUID GLUE	1	N/A	BLACK
H	CABLE	1	UL 246+ 26AWG*6C+A1 +B	BLACK(PVC JACKET)
G	HEAT SHRINK TUBE	7	125° 300V	BLACK
F	INNER MOLD	1	PVC	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	8	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (180° IP67) FEMALE CONN. FEMALE 8 PIN/LOCK TYPE				
DWN	Yang	PART NO.:	2CT3004-W08202H	
CHKD	JF	SCALE:	1:1	UNIT: mm
APVD	Steve	SIZE:	A3	SHEET: 1 OF 1 REV: A
CUSTOMER COPY				