

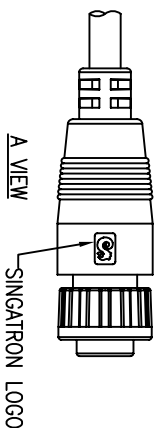


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S100127-3A	LILY	2010.02.23	

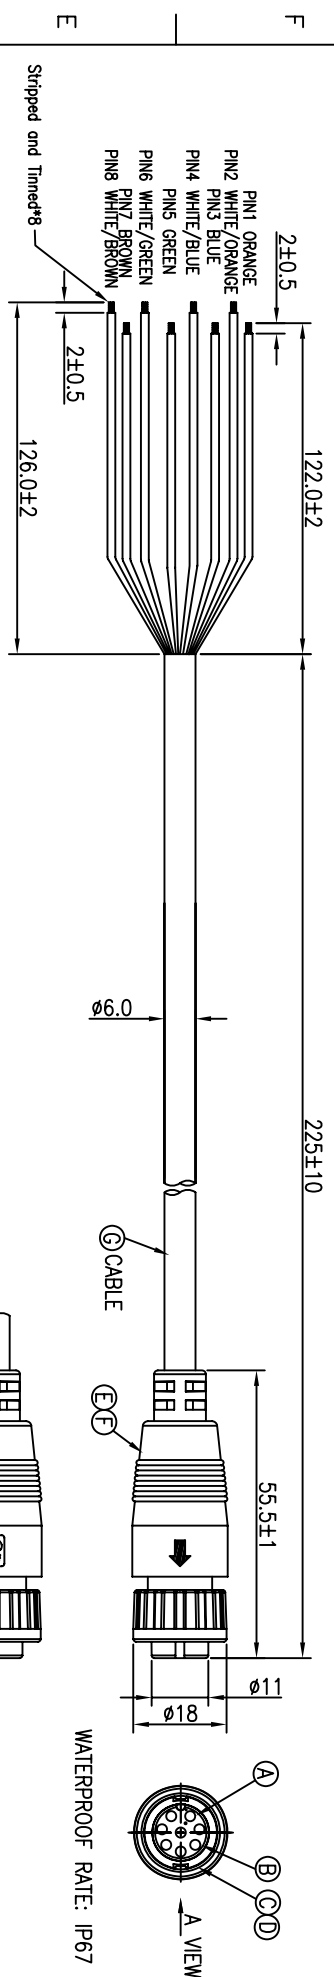

WHITE/BROWN	8
BROWN	7
WHITE/GREEN	6
GREEN	5
WHITE/BLUE	4
BLUE	3
WHITE/ORANGE	2
ORANGE	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: Gr. Pass

G	CABLE	1	CAT.5e FTP 24AWG*4P +My+D+Al/My,OD=06.0	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	8	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE		CIRCULAR STANDARD SIZE (180° IP67)		
DWG		LILY		
CHKD		Steve		
APVD		Max		
DECIMALS:		ANGLES:	PART NO.2CT3004-W08302	
X	:±0.5	X	:±2°	SCALE 2:1
X X	:±0.3	X X	:±1'	UNIT: mm
X XX	:±0.2			SHEET: 1 OF 1
CUSTOMER COPY				