

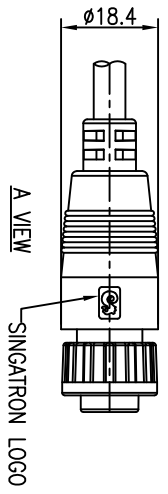


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.: C100520-1A	Shown	2010.05.25

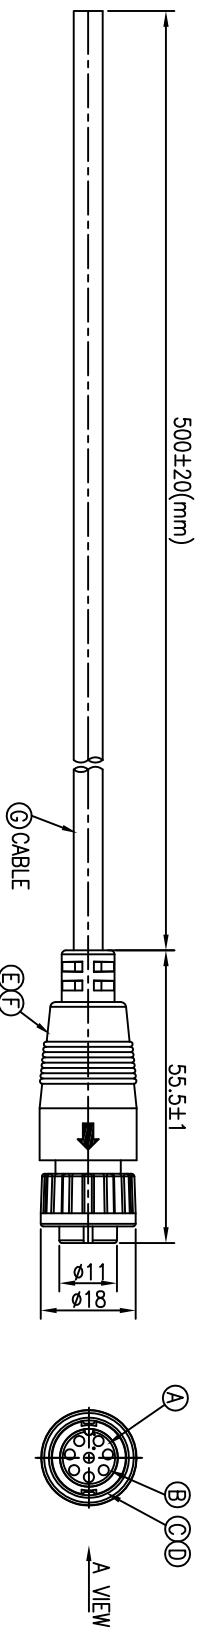

8	WHITE/BROWN
7	BROWN
6	WHITE/GREEN
5	GREEN
4	WHITE/BLUE
3	BLUE
2	WHITE/ORANGE
1	ORANGE
CONN. WIRE COLOR	
PIN OUT	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

G	CABLE	1	AMP CAT-5e UTP 24AWG*4P, OD=5.5	GRAY(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	8	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE	CIRCULAR STANDARD SIZE (180° IP67)
X : ±0.5	X : ±2°	DWN	Female Conn. Female 8 Pin/Lock Type
X.X : ±0.3	X.X : ±1°	CHKD	Steve
X.XX : ±0.2		APVD	Max

PART NO. 2CT3004-W08312
SCALE 2:1 UNIT: mm
SIZE: A3 SHEET: 1 OF 1 REV: A