
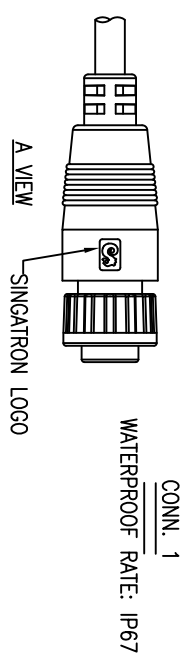


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S100723-2A	LLY	2010.08.06

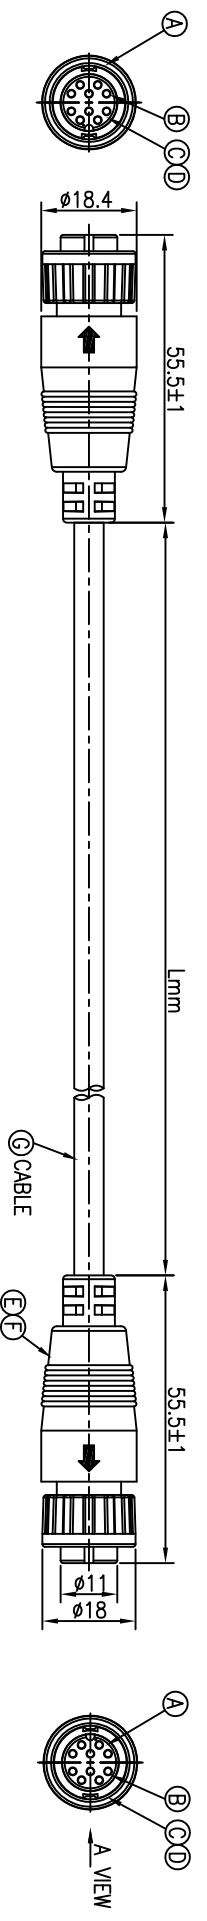


P/N	CABLE L(mm)
2CT3004-W10209	L=200±10
2CT3004-W10210	L=400±20
2CT3004-W10211	L=900±45
2CT3004-W10212	L=1300±65

CONN. 2	CONN. 1
10	10
9	9
8	8
7	7
6	6
5	5
4	4
3	3
2	2
1	1

CONN. 1	CONN. 2
10	10
9	9
8	8
7	7
6	6
5	5
4	4
3	3
2	2
1	1

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 2A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:



G	CABLE	1	UL2464 26AWG*10C	BLACK		
F	INNER MOLD	2	+A/My(UV Resistant)	NATURAL		
E	OVER MOLD	2	PVC	BLACK		
D	O-RING	2	EPDM	BLACK		
C	LOCK NUT	2	NYLON+33%GF	BLACK		
B	FEMALE PIN	20	Phosphor Bronze Alloy	6u" GOLD PLATED OVER NICKEL PLATING		
A	BODY	2	NYLON+33%GF	BLACK		
UNLESS OTHERWISE SPECIFIED TOLERANCES						
Singatron Enterprise Co., Ltd. 信亨企業股份有限公司						
TITLE: CIRCULAR STANDARD SIZE (180° IP67)						
DECIMALS: ANGLES: FEMALE CONN. FEMALE TO PIN/LOCK TYPE						
X	:±0.5	X	:±2°	DIM	LLY	PART NO.2CT3004-W102XX
XX	:±0.3	XX	:±1°	CHKD	Stev	SCALE 2:1 UNIT: mm
XXX	:±0.2			APVD	Quon	SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY