


| REV. | ECN NO.  | OR DESCRIPTION | REVISED | DATE       |
|------|----------|----------------|---------|------------|
| A    | PDR NO.: | 1091119-4A     | LLY     | 2010.02.22 |
| B    | ECN NO.: | S100524        | LLY     | 2010.07.13 |
| C    | ECR NO.: | S101210        | Hoflen  | 2010.12.24 |

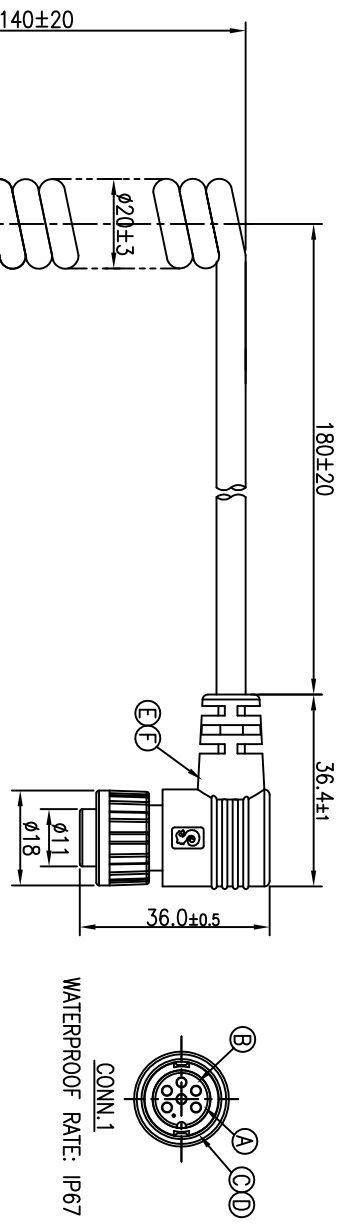

WATERPROOF RATE: IP67


|   |        |   |
|---|--------|---|
| 1 | GREEN  | 6 |
| 2 | YELLOW | 5 |
| 3 | ORANGE | 4 |
| 4 | RED    | 3 |
| 5 | BROWN  | 2 |
| 6 | BLACK  | 1 |

WIRE COLOR


CONN.1

CONN.2

PIN OUT



- NOTES:
1. WATERPROOF RATE: IP67
  2. CURRENT RATING: 5A
  3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

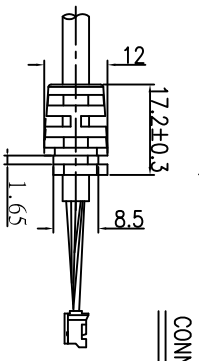

| NO | DESCRIPTION | QTY | MATERIAL              | PLATING & COLOR                      |
|----|-------------|-----|-----------------------|--------------------------------------|
| A  | BODY        | 1   | NYLON+33%GF           | BLACK                                |
| B  | FEMALE PIN  | 6   | Phosphor Bronze       | 6u" GOLD PLATING OVER NICKEL PLATING |
| C  | LOCK NUT    | 1   | NYLON+33%GF           | BLACK                                |
| D  | O-RING      | 1   | EPDM                  | BLACK                                |
| E  | OVER MOLD   | 2   | PVC                   | BLACK                                |
| F  | INNER MOLD  | 1   | TPU                   | NATURAL                              |
| G  | CABLE       | 1   | 24#*6C+D+AL OD5.0     | BLACK(PU JACKET)                     |
| H  | CONNECTOR   | 1   | BRASS NYLON66 UL94V-0 | TIN-PLATING WHITE                    |

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

CIRCULAR STANDARD SIZE (90° IP67)  
FEMALE CONN. FEMALE BRN(5A) LOCK TYPE

PART NO. 2CT3010-W06301

SCALE 1:1 UNIT: mm

SIZE: A2 SHEET: 1 OF 1 REV: C

CUSTOMER COPY