



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T110808-3A	LLY		2011.12.01
B	ECN NO.:S140651	YF		2014.06.20

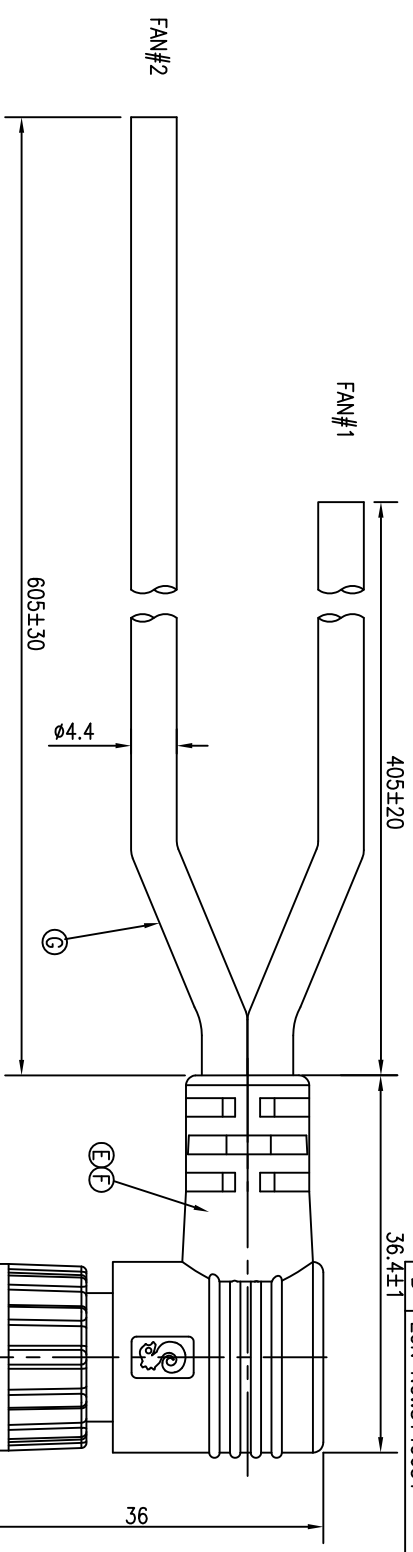

GREEN	8	
WHITE	7	
BROWN	6	FAN#2
ORANGE	5	
BLUE	4	
YELLOW	3	
BLACK	2	FAN#1
RED	1	
WIRE COLOR	CONN.1	
PIN OUT		



- NOTES:
1. WATERPROOF RATE: IP65
  2. CURRENT RATING: 5A
  3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.F. PASS

**A**

G	CABLE	2	UL2464 24#*4C+A/My UV RESISTANT OD:4.4	BLACK(PCV JACKET)
F	INNER MOLD	1	PVC	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	8	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
 信昌企業股份有限公司

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	CIRCULAR STANDARD SIZE (90° IP65) TYPE
DWN	FEMALE CONN. FEMALE 8 PIN/LOCK
CHKD	Harden
APVD	Quan
PART NO.	2CT3010-W08305H
SCALE	2:1
UNIT	mm
SHEET	1 OF 1
REV.	B

CUSTOMER COPY