


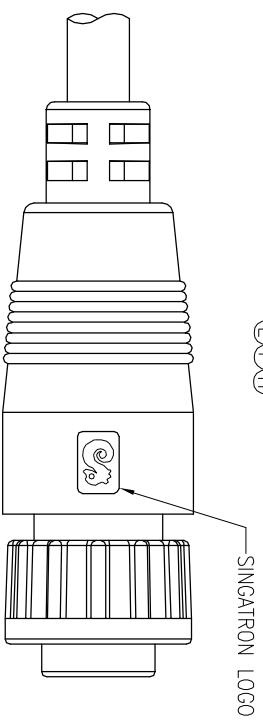


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S150309-8C	Yong	2015.06.29

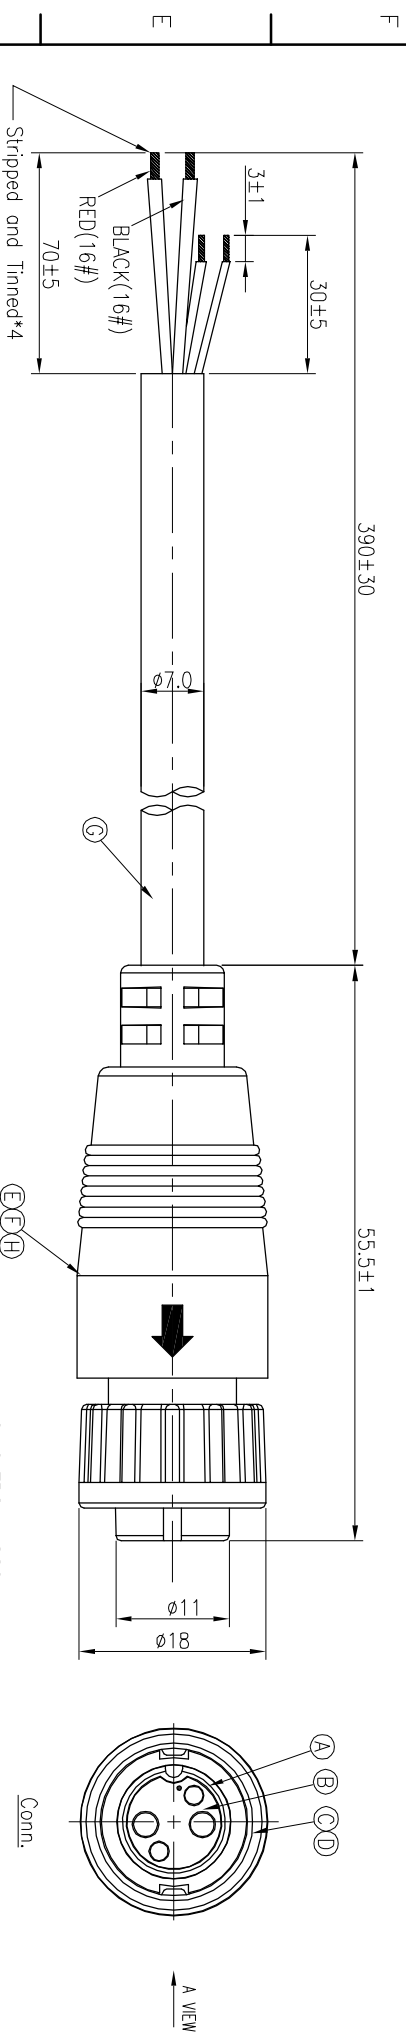

RED(16#)	4
BROWN(26#)	3
BLACK(16#)	2
ORANGE(26#)	1
WIRE COLOR	CONN.
PIN OUT	



- NOTES:
1. WATERPROOF RATE: IP67
 2. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

A VIEW

CONN. WATERPROOF RATE: IP67

Pin Assignments	
Front View	

H	TUBE	4	125°C 300V	BLACK
G	CABLE	1	UL2464 16AWG*2C+ (26#*1P+AL)+F+AL (UV RESISTANT)OD 7.0	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	MALE PIN	4	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
 信登企業股份有限公司

TITLE	CIRCULAR STANDARD SIZE (LOCK TYPE) FEMALE CONN. MALE (2+2) PIN(10+5)A
DWN	Yong
CHKD	Jf
APVD	Horlen
PART NO. 2CT3016-W04810H	
SCALE 2:1 UNIT: mm	
SIZE: A3 SHEET: 1 OF 1	
REV: A	

CUSTOMER COPY