




REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO: T150313-8A	Yang		2015.07.15

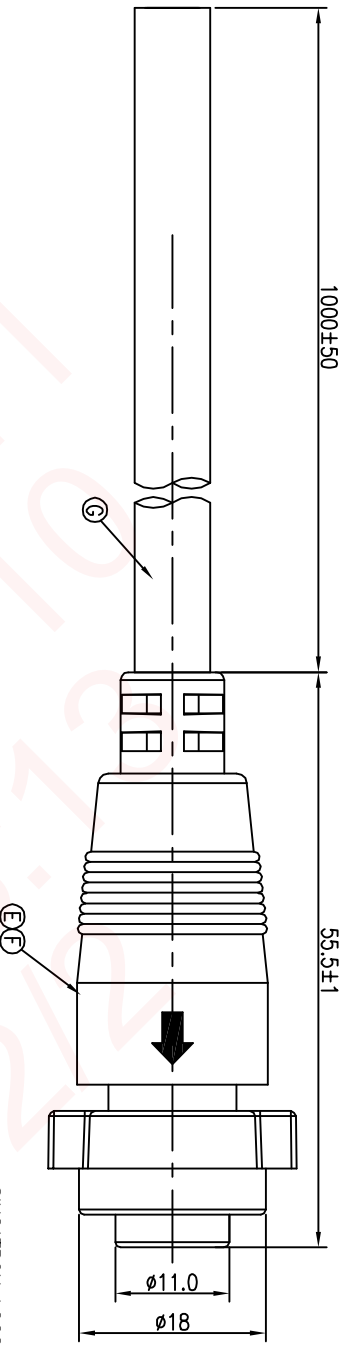


CONN. WATERPROOF RATE: IP55

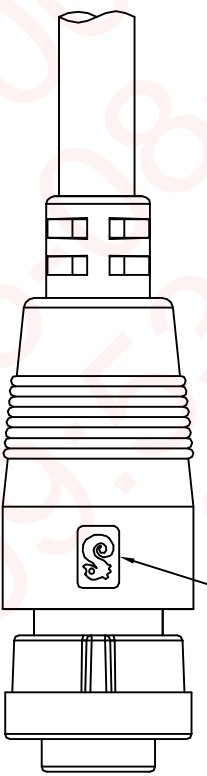

BROWN(20)	4
WHITE(18#)	3
BLUE(20#)	2
BLACK(18#)	1
WIRE COLOR	CONN.

PIN OUT



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP55
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -20°C TO +80°C
CURRENT RATING: 5+10A
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	CABLE	1	UL2464 18AWG*2C+ 20#*2C OD7.3 (UV RESISTANT)	BLACK (PVC JACKET)
F	INNER MOLD	1	PVC	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	MALE PIN	4	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (IP55) FEMALE CONN. MALE 2+2PINS(5+10A) LOCK TYPE				
DMN	Yang	PART NO.	2CT8016-W04811H	
CHKD	JF	SCALE	2:1	UNIT: mm
APVD	Harlen	SIZE: A3	SHEET: 1 OF 1	REV: A

CUSTOMER COPY