

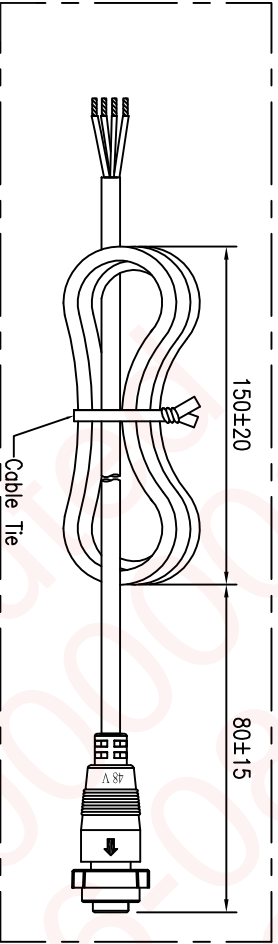



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO:S150416-2A		Yang	2015.07.09
B	ECN NO:S160811-C		Yang	2016.8.3

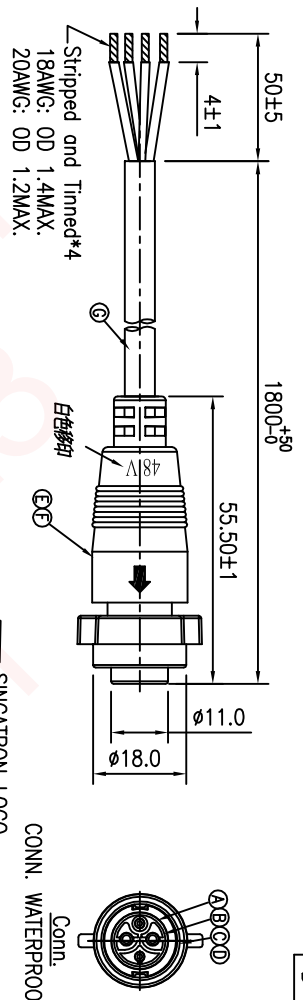

WIRE COLOR	CONN.
BROWN(20#)	4
WHITE(18#)	3
BLUE(20#)	2
BLACK(18#)	1



- NOTES:
1. WATERPROOF RATE: IP55
  2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -20°C TO +80°C  
CURRENT RATING: 5+10A
  3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	PA66+GF	BLACK
B	MALE PIN	4	BRASS	GOLD PLATING OVER NICKEL PLATING
C	LOCK NUT	1	PA66+GF	BLACK
D	O-RING	1	EPDM	BLACK
E	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	PVC	NATURAL
G	CABLE	1	UL2464 18AWG*2C+ 20#*2C+1 ODT7.3 (UV RESISTANT)	BLACK (PVC JACKET)

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.  
 信登企業股份有限公司  
 CIRCULAR STANDARD SIZE (IP55)  
 FEMALE CONN. MALE 2+2PIN(5+10A) LOCK TYPE  
**PART NO.2CT9016-W04813H**  
 SCALE 1:1 UNIT: mm  
 SIZE: A3 SHEET: 1 OF 1  
**REV:B**  
**CUSTOMER COPY**