





REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR	NO:T150408-1A	JF	2015.07.15

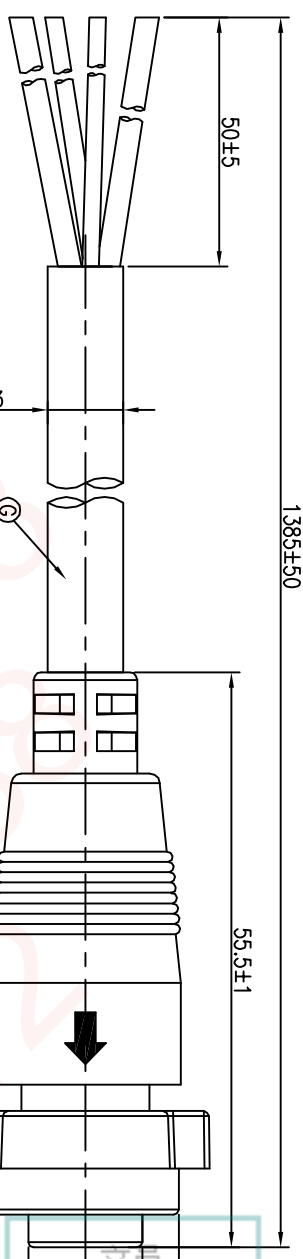

CONN. WATERPROOF RATE: IP55

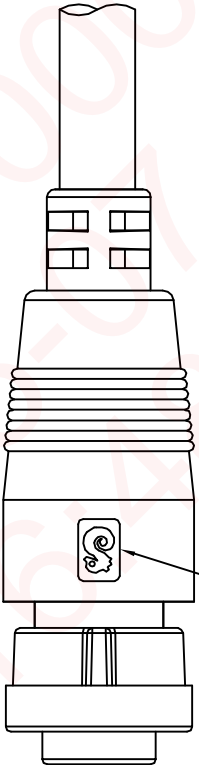

BROWN	4
WHITE(18#)	3
BLUE	2
BLACK(18#)	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP55
  2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -20°C TO +80°C  
CURRENT RATING: 5+10A
  3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	PA66+GF	BLACK
B	MALE PIN	4	BRASS	1u" GOLD PLATING OVER NICKEL PLATING
C	LOCK NUT	1	PA66+GF	BLACK
D	O-RING	1	EPDM	BLACK
E	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	PVC	NATURAL
G	CABLE	1	UL2464 18AWG*2C+ 20#*2C OD7.3 (UV RESISTANT)	BLACK (PVC JACKET)

TIN PLATING

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.  
信亨企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (IP55) FEMALE CONN. MALE 2+PIN(S10A) LOCK TYPE  
DWN: JF PART NO. 2CT9016-W04814H  
CHKD: Yang SCALE 2:1 UNIT: mm  
APVD: Blues SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY