

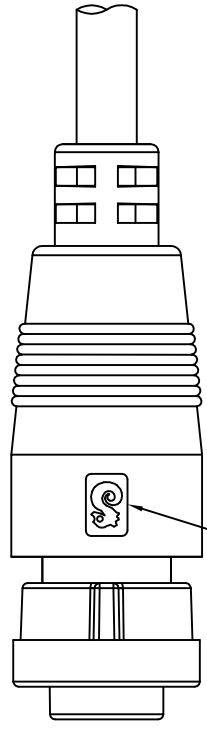



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.1160303-15A	Yang		2016.10.13

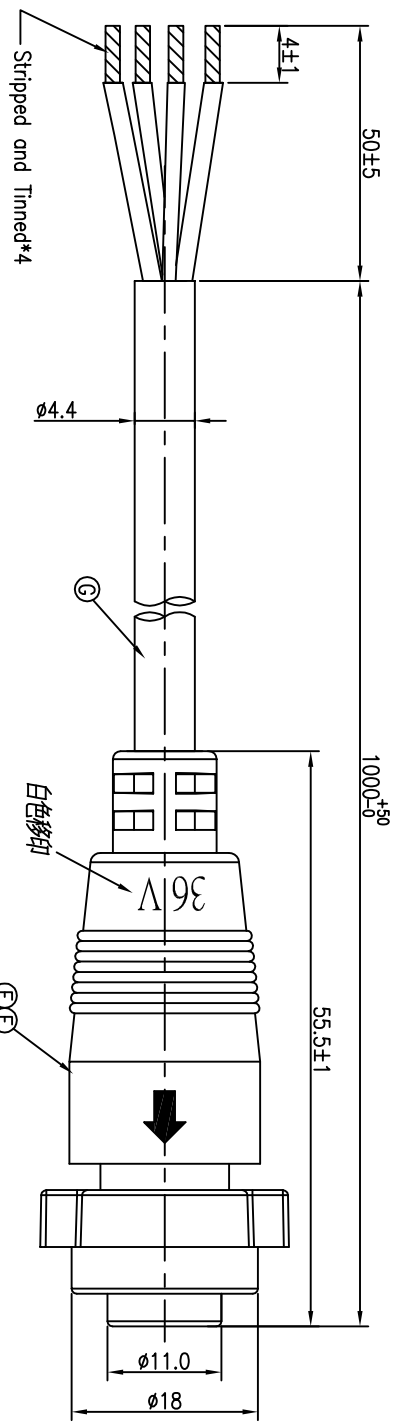

CONN. WATERPROOF RATE: IP55

YELLOW	4
RED	3
GREEN	2
WHITE	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP55
  2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -20°C TO +80°C  
CURRENT RATING: 5A
  3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	CABLE	1	UL2464 24AWG*4C+AI/My (UV RESISTANT)	BLACK (PVC JACKET)
F	INNER MOLD	1	PVC	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	MALE PIN	4	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (IP55) FEMALE CONN. MALE 2+2PINS(SA) LOCK TYPE				
DMN	Yang		PART NO.2CT9016-W04817H	
CHKD	JF		SCALE 2:1 UNIT: mm	
APVD	Horlen		SIZE: A3 SHEET: 1 OF 1	REV:A

CUSTOMER COPY