

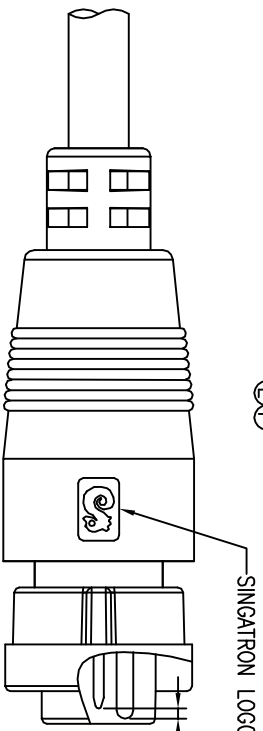


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.1170317-4A	Jun	2019.01.18

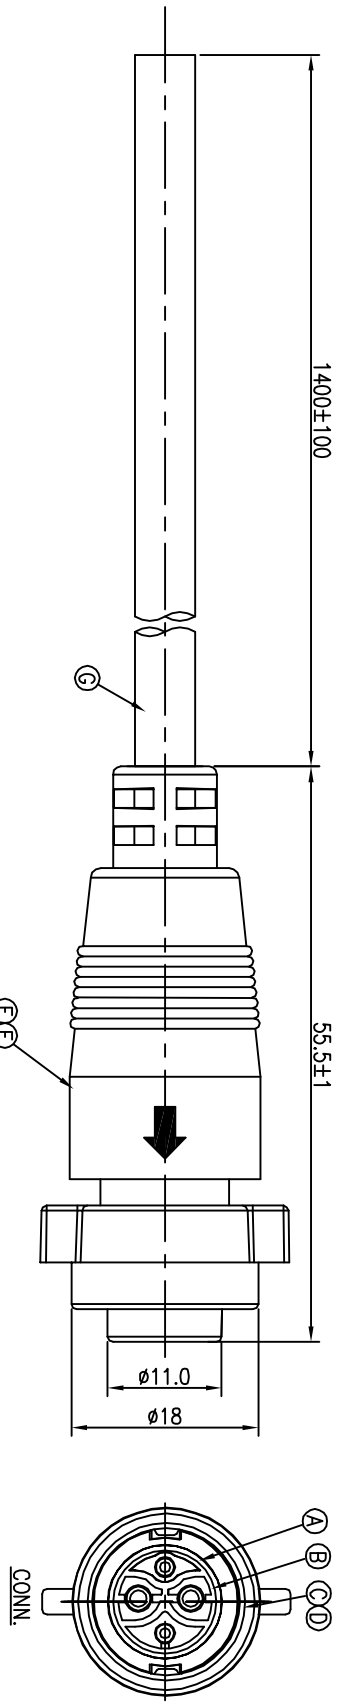

ORANGE 22AWG (CANL)	4
RED 16AWG (+36V)	3
GREY 22AWG (CANH)	2
BLACK 16AWG (GND)	1
WIRE COLOR & SPEC	CONN.
PIN OUT	



Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP67
  2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -20°C TO +80°C  
CURRENT RATING: 10A+5A
  3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	CABLE	1	UL2464 16#*2C+22#*2C +AL/MY UV	BLACK (PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	MALE PIN	4	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信亨企業股份有限公司				
TITLE CIRCULAR STANDARD SIZE				
DECIMALS: ANGLES: TITLE FEMALE CONN. MALE 2+2PIN LOCK TYPE				
X	:±0.5	X	:±2'	DMN Jun PART NO.2CT13016-W04823H
XX	:±0.3	XX	:±1'	CHKD Cary SCALE 2:1 UNIT: mm
XXX	:±0.2			APVD William SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY