

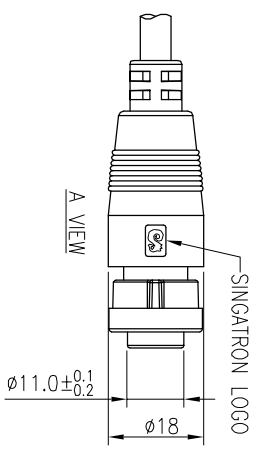


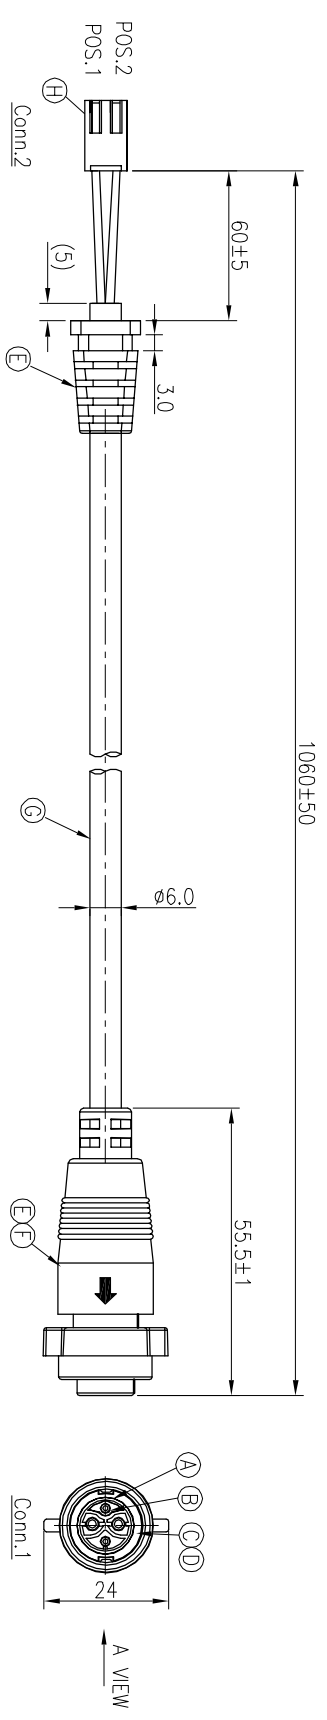


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T171122-1A		Jun	2018.01.15



3	RED	1
1	BLACK	2
CONN.1 WIRE COLOR		CONN.2
PIN OUT		



- NOTES:
1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS TEMPERATURE RANGE:-20°C TO +80°C CURRENT RATING: 10A
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

H	CONNECTOR	2	TU6001TB0-A	TINNED
		1	TU6001HND-02	WHITE
G	CABLE	1	UL2464 16AWG*2C +AL/MY UV OD6.0	BLACK (PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+30%GF(A0620NH)	BLACK
B	MALE PIN	4	HBI59-1.5B G1	1u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF(A0620NH)	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: X :±0.5 X :±2° X.X :±0.3 X.X :±1' X.XX :±0.2

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

CIRCULAR STANDARD SIZE (LOCK TYPE)
FEMALE CONN. MALE 2+2 PIN

DWN Jun PART NO.2CT9016-W04827H
CHKD JF SCALE 1:1 UNIT: mm
APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY