

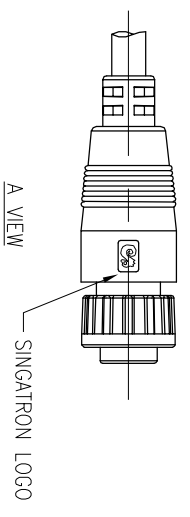


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150720-2B	Yong	2015.12.16	

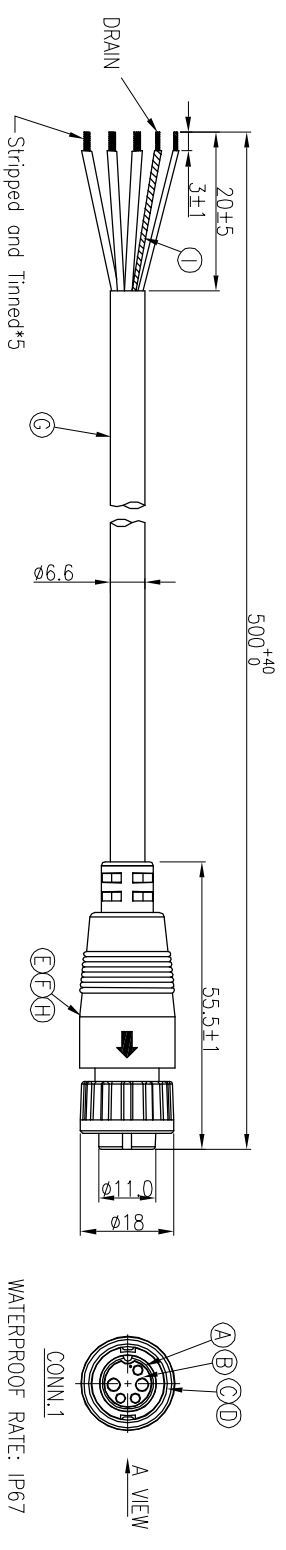

WHITE (0.75mm <sup>2</sup> )	5
DRAIN (0.2mm <sup>2</sup> )	4
RED (0.2mm <sup>2</sup> )	3
BLACK (0.75mm <sup>2</sup> )	2
WHITE (0.2mm <sup>2</sup> )	1
WIRE COLOR	CONN.1
PIN OUT	CONN.1



Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP67(WHEN PROPERLY MATED)
  2. CURRENT RATING: 5+10A
  3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

I	TUBE	1	125°C 300V	BLACK
H	TUBE	5	125°C 300V	BLACK
G	CABLE	1	(2*0.2mm <sup>2</sup> +0.2mm <sup>2</sup> 地線)+2*0.75mm <sup>2</sup>	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	MALE PIN	5	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信譽企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (LOCK TYPE) FEMALE CONN. MALE (2+3) PIN(10+5)A				
DWN	Yong	PART NO.2CT3016-W05821H		
CHKD	Wicky	SCALE 1:1	UNIT: mm	
APVD	Horlen	SIZE: A3	SHEET: 1 OF 1	REV:A
CUSTOMER COPY				