


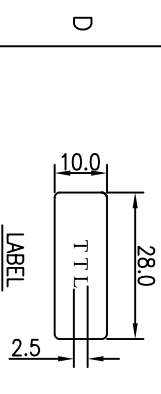


REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T101208-2A	Shown	2011.01.08

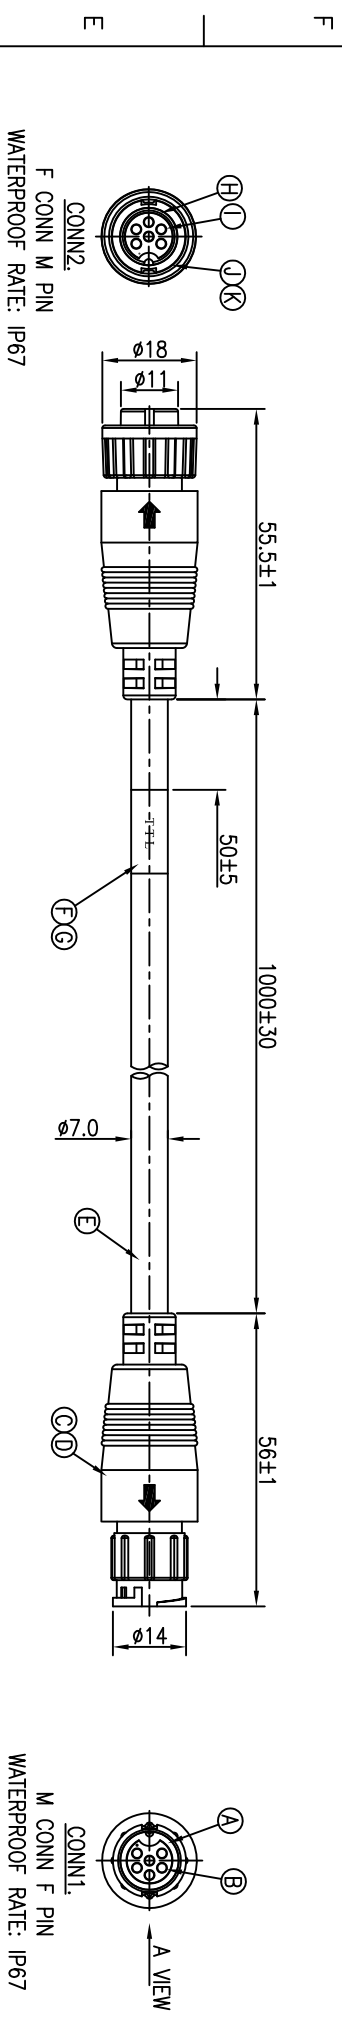

6	BROWN	6
5	GREEN	5
4	YELLOW	4
3	ORANGE	3
2	/	2
1	/	1
CONN1. WIRE COLOR		CONN2.
PIN OUT		

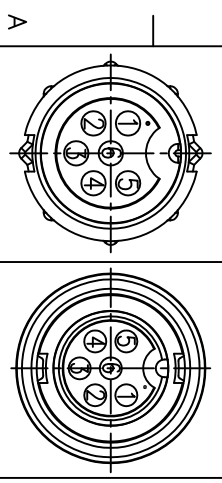

- NOTES:
1. WATERPROOF RATE: IP67  
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
  2. CURRENT RATING: 5A
  3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: [C.P. CLASS]

K	O-RING	1	EPDM	BLACK
J	LOCK NUT	1	NYLON+33%GF	BLACK
I	MALE PIN	6	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
H	BODY	1	NYLON+33%GF	BLACK
G	HEAT SHRINK TUBE	1	125' 300V L=40	TRANSPARENT
F	LABEL	1	PET 128 W10	WHITE
E	CABLE	1	UL2464 22#*6C+A+D UV RESISTANT OD=7.0	BLACK(PVC JACKET)
D	INNER MOLD	2	TPU	NATURAL
C	OVER MOLD	2	PVC	BLACK
B	FEMALE PIN	6	PHOSPHOR BRONZE	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2'
X.X :±0.3	X.X :±1'
X.XX :±0.2	

Singatron Enterprise Co., Ltd.  
信管企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)  
F CONN. MALE PIN 6 PIN(S4) LOCK TYPE  
PART NO. 2CT3016-W06304

CHKD: Steve SCALE 1:1 UNIT: mm  
APVD: Max SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY