
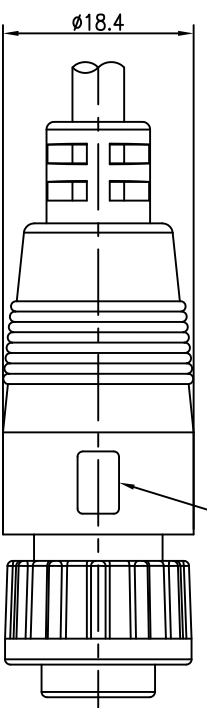




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S120515-16A	Shown	2012.06.20
B	ECN NO.:S130768	JF	2013.07.29

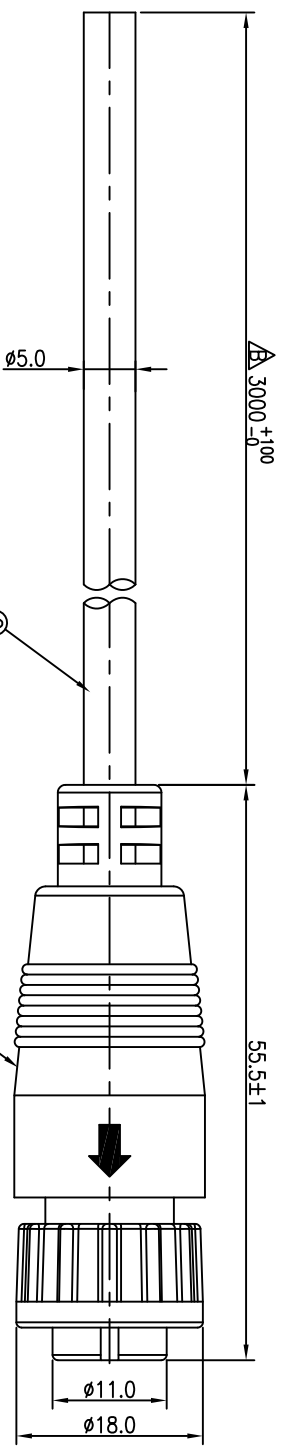

A VIEW

6	WHITE
5	RED
4	BLACK
3	YELLOW
2	GREEN
1	BLUE
CONN WIRE COLOR	
PIN OUT	
CONN.	

- NOTES:
1. WATERPROOF RATE: IP67
  2. IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
  3. CURRENT RATING: 5A
  4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
  5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:



Pin Assignments  
Front View

G	CABLE	1	UL2464 24AWG*6C+AL UV RESISTANT OD=ø5.0	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	MALE PIN	6	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO DESCRIPTION		QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信亨企業股份有限公司				
TITLE CIRCULAR STANDARD SIZE (LOCK TYPE)				
DWG JF PART NO.2CT3016-W06307H				
CHKD Horten SCALE 2:1 UNIT: mm				
APVD Quan SIZE: A3 SHEET:1 OF 1 REV: B				
CUSTOMER COPY				