

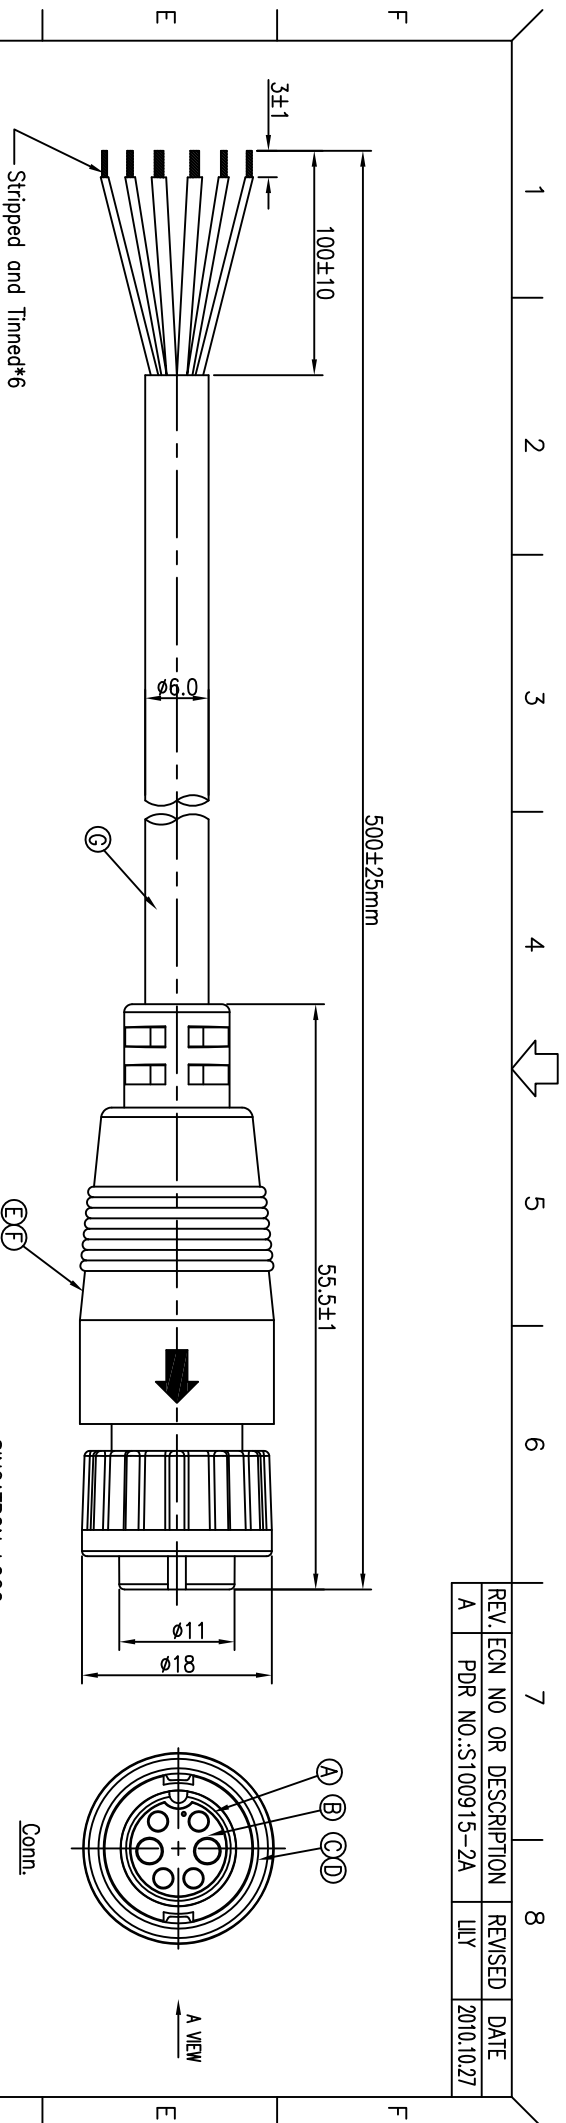


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S100915-2A	LJY	2010.10.27




GREEN(24#)	6
RED(18#)	5
YELLOW(24#)	4
WHITE(24#)	3
BLACK(18#)	2
BLUE(24#)	1
WIRE COLOR	CONN.
PIN OUT	

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 5. REPRESENT CRITICAL DIMENSIONS.

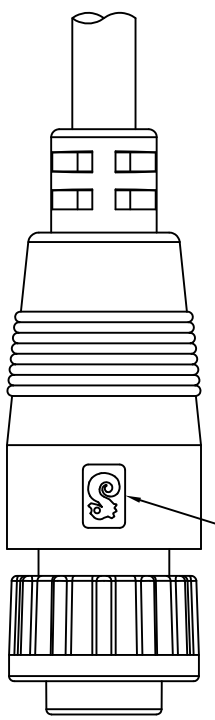

G	CABLE	1	UL2464 24AWG*4C+ 18#*2C+AL/MY (UV RESISTANT)	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	MALE PIN	6	HB159-1.5B	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:	ANGLES:	CIRCULAR STANDARD SIZE (LOCK TYPE) FEMALE CONN. MALE (24#) PIN (10+5)A	
X : ±0.5	X : ±2°	PART NO.2CT3016-W06801	
XX : ±0.3	XX : ±1'	CHKD	SCALE 2:1 UNIT: mm
XXX : ±0.2		APVD	SIZE: A3 SHEET:1 OF 1 REV:A



CUSTOMER COPY