

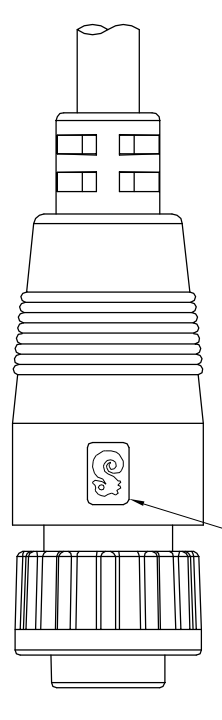


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150309-8B	Yong	2015.06.29	

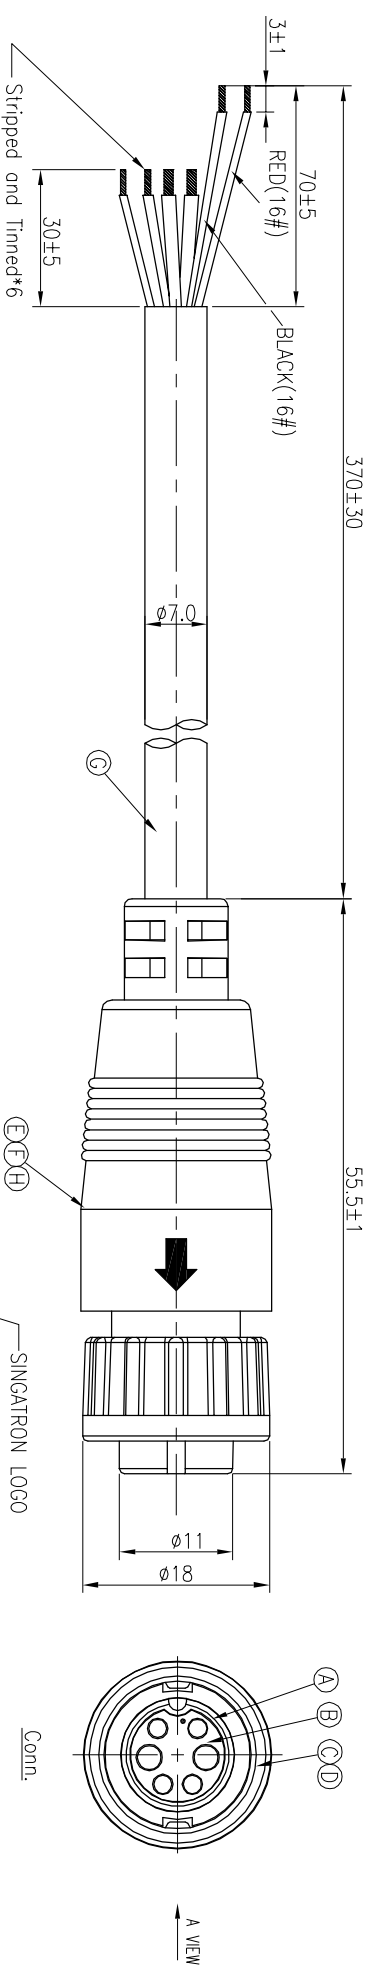

ORANGE/WHITE(26#)	6
RED(16#)	5
BROWN(26#)	4
BROWN/WHITE(26#)	3
BLACK(16#)+DRAIN	2
ORANGE(26#)	1
WIRE COLOR	CONN.
PIN OUT	



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

Pin Assignments	
Front View	

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	NYLON+GF	BLACK
B	MALE PIN	6	BRASS	GOLD PLATING OVER NICKEL PLATING
C	LOCK NUT	1	NYLON+GF	BLACK
D	O-RING	1	EPDM	BLACK
E	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	TPU	NATURAL
G	CABLE	1	UL2464 26AWG*2P+ 16#*2C+F+D+AL (UV RESISTANT) OD 7.0	BLACK
H	TUBE	6	125°C 300V	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (LOCK TYPE)
FEMALE CONN. MALE (2+4) PIN(10+5)A
DWN Yong PART NO. 2CT3016-W06833H
CHKD JF SCALE 2:1 UNIT: mm
APVD Horlen SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY