




REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PDR NO.:S150730-7A	Yong	2015.10.26

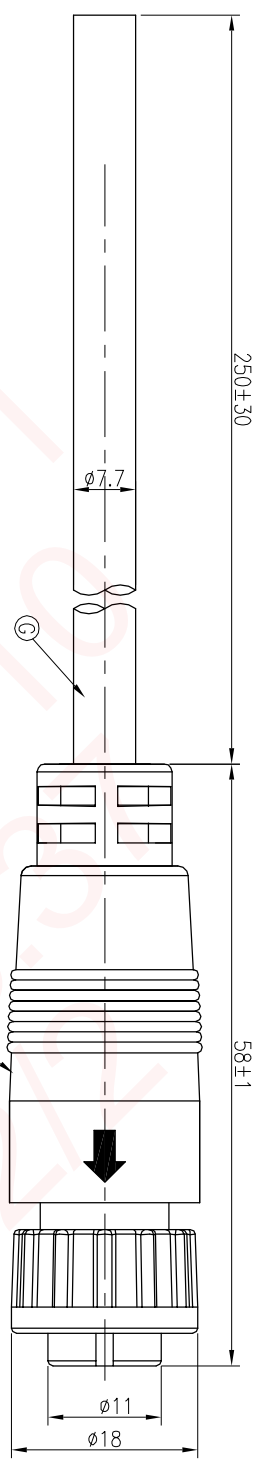


CONN. WATERPROOF RATE: IP67

WHITE/ORANGE(26#)	6
RED(15#)	5
GREEN(26#)	4
WHITE/GREEN(26#)	3
BLACK(15#)	2
ORANGE(26#)	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

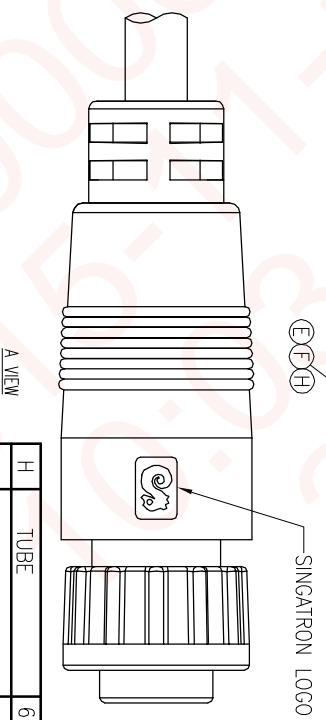

A VIEW

H	TUBE	6	125°C 300V	BLACK
G	CABLE	1	UL2464(2P*26AWG)+ AL.MYLAR+2C*15AWG+T	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	MALE PIN	6	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
 信登企業股份有限公司

TITLE	CIRCULAR STANDARD SIZE (LOCK TYPE) FEMALE CONN. MALE (2+4) PIN(10+5)A
DWN	Yong
CHKD	JF
APVD	Horlen
PART NO.2CT3016-W06837H	
SCALE 2:1 UNIT: mm	
SIZE: A3 SHEET: 1 OF 1	
REV: A	

CUSTOMER COPY